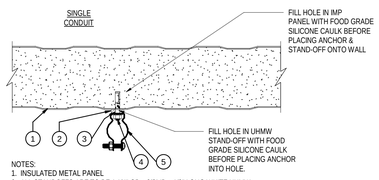

NOTES:
1. INSULATED METAL PANEL
2. ALL STANDOFFS ARE TO BE 1 1/4" OD x 3/8" ID x 1/2" LONG WHITE UHMW.
3. CONTRACTOR SHALL USE DOW SILICONE 732 FOOD GRADE CAULK OR EQUIVALENT. CAULK SHALL BE APPLIED TO STANDOFF BEFORE PLACED ON THE WALL AND THEN WIPED CLEAN.
4. FAB-LOK FASTENERS WITH A 1/2"-3/4" GRIP RANGE (ELCO PART NUMBER: EZJ250) ARE TO BE USED. FOR WALL BRACKETS, FASTENER IS TO BE INSERTED THRU BRACKET AND STANDOFF.
5. MINERALLAC CONDUIT HANGERS:
   - 3/4" CONDUIT - PART NUMBER 1SB
   - 1" CONDUIT - PART NUMBER: 2SB
   - 1 1/4" CONDUIT - PART NUMBER: 3SB
   - 1 1/2" CONDUIT - PART NUMBER: 4SB
   - 2" CONDUIT HANGER PART NUMBER: 5SB
6. SINGLE HANGERS ARE TO BE FASTENED TO WALL PANELS WITH STANDOFFS ON THE RAISED PORTION OF THE WALL WITH FAB-LOK FASTENER. FOR SINGLE HANGERS, FASTENER IS TO BE INSERTED THRU ONLY THE STANDOFF - NOT THE HANGER.
7. CONDUIT SHALL HAVE A MINIMUM OF 1 1/2" CLEARANCE BETWEEN ACTUAL OUTSIDE EDGES OF PIPE/CONDUIT - NOT BETWEEN CENTERS.
8. THIS BRACKET IS NOT DESIGNED TO SUPPORT ANY VERTICAL LOAD. ALL CONDUIT MUST BE SUPPORTED FROM TRUSS HANGERS, CURBING OR EQUIPMENT. THIS BRACKET IS DESIGNED ONLY TO HELP KEEP CONDUITS EVENLY SPACED ON A WALL PANEL.

B3 IMP SINGLE CONDUIT HANGER

SCALE: NOT TO SCALE

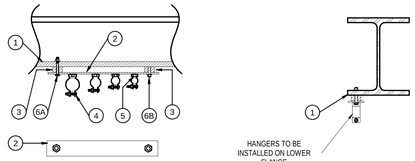

NOTES:
1. HORIZONTALLY INSTALLED W-BEAM
2. ALL BRACKETS SHALL BE 3/16" x 2" STAINLESS STEEL FLAT BAR WITH 5/16" MOUNTING HOLES. HOLES ARE TO BE FIELD LOCATED AND DRILLED.
3. ALL STANDOFFS ARE TO BE 1 1/4" OD x 3/8" ID x 1/2" LONG WHITE UHMW.
4. MINERALLAC CONDUIT HANGERS (SEE NOTE 5):
   - 3/4" CONDUIT - PART NUMBER 1SB
   - 1" CONDUIT - PART NUMBER: 2SB
   - 1 1/4" CONDUIT - PART NUMBER: 3SB
   - 1 1/2" CONDUIT - PART NUMBER: 4SB
   - 2" CONDUIT HANGER PART NUMBER: 5SB
5. CONDUIT HANGERS ARE TO BE FASTENED TO BRACKETS WITH 1/4"-20 X 1/2" LONG STAINLESS STEEL WELD STUD WITH NYLOCK NUT. CLAMPING SCREWS ARE TO BE REPLACED WITH 1/4-20 STAINLESS STEEL HEX HEAD BOLTS AND NYLOCK NUTS. BOLT THREADS ARE TO EXTEND A MAXIMUM OF 1/4" PAST THE NUT.
6. HANGERS ARE TO BE ATTACHED TO BRACKETS BY EITHER:
   A. 1/4-20 S/S HEX HEAD BOLT, WASHERS AND NYLOCK NUT
   B. 1/4-20 S/S WELD STUD, WASHER AND NYLOCK NUT. BOLT THREADS ARE TO EXTEND A MAXIMUM OF 1/4" PAST THE NUT.
7. CONDUIT SHALL HAVE A MINIMUM OF 1 1/2" CLEARANCE BETWEEN ACTUAL OUTSIDE EDGES (NOT BETWEEN CENTERS).
8. THIS BRACKET IS NOT DESIGNED TO SUPPORT ANY VERTICAL LOAD. ALL CONDUIT MUST BE SUPPORTED FROM TRUSS HANGERS, CURBING OR EQUIPMENT. THIS BRACKET IS DESIGNED ONLY TO HELP KEEP CONDUITS EVENLY SPACED ON A WALL PANEL.

B4 W-BEAM CONDUIT HANGER

SCALE: NOT TO SCALE

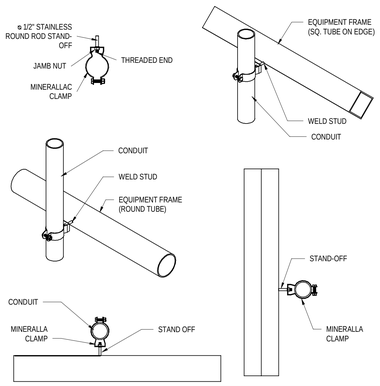

B5 PROCESS AREA CONDUIT

SCALE: NOT TO SCALE

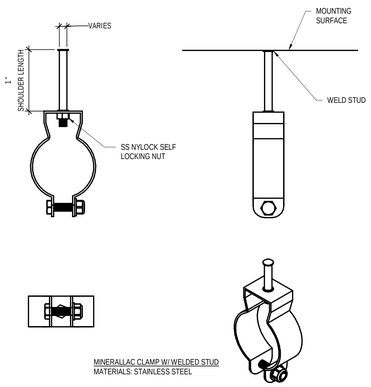

A2 STUD WELDED CONDUIT HANGER

SCALE: NOT TO SCALE



A3 CABLE CLAMP TO STEEL COLUMN

SCALE: NOT TO SCALE



NOTES:
1. INSULATED METAL PANEL
2. ALL BRACKETS SHALL BE 3/16" x 2" STAINLESS STEEL FLAT BAR WITH 3/8" MOUNTING HOLES FOR FAB-LOK ANCHORS. MOUNTING HOLES ARE TO BE FIELD LOCATED AND DRILLED AND ARE EACH TO BE CENTERED ON THE RAISED PORTIONS OF THE WALL PANEL.
3. ALL STANDOFFS ARE TO BE 1 1/4" OD x 3/8" ID x 1/2" LONG WHITE UHMW.
4. CONTRACTOR SHALL USE DOW SILICONE 732 FOOD GRADE CAULK OR EQUIVALENT. CAULK SHALL BE APPLIED TO STANDOFF BEFORE PLACED ON THE WALL AND THEN WIPED CLEAN.
5. FAB-LOK FASTENERS WITH A 1/2"-3/4" GRIP RANGE (ELCO PART NUMBER: EZJ250) ARE TO BE USED. FOR WALL BRACKETS, FASTENER IS TO BE INSERTED THRU BRACKET AND STANDOFF.
6. MINERALLAC CONDUIT HANGERS:
   - 3/4" CONDUIT - PART NUMBER 1SB
   - 1" CONDUIT - PART NUMBER: 2SB
   - 1 1/4" CONDUIT - PART NUMBER: 3SB
   - 1 1/2" CONDUIT - PART NUMBER: 4SB
   - 2" CONDUIT HANGER PART NUMBER: 5SB
7. CONDUIT HANGERS ARE TO BE FASTENED TO BRACKETS WITH 1/4"-20 X 1/2" LONG STAINLESS STEEL WELD STUD WITH NYLOCK NUT. CLAMPING SCREWS ARE TO BE REPLACED WITH 1/4-20 STAINLESS STEEL HEX HEAD BOLTS AND NYLOCK NUTS. BOLT THREADS ARE TO EXTEND A MAXIMUM OF 1/4" PAST THE NUT.
8. CONDUIT SHALL HAVE A MINIMUM OF 1 1/2" CLEARANCE BETWEEN ACTUAL OUTSIDE EDGES OF PIPE/CONDUIT - NOT BETWEEN CENTERS.
9. THIS BRACKET IS NOT DESIGNED TO SUPPORT ANY VERTICAL LOAD. ALL CONDUIT MUST BE SUPPORTED FROM TRUSS HANGERS, CURBING OR EQUIPMENT. THIS BRACKET IS DESIGNED ONLY TO HELP KEEP CONDUITS EVENLY SPACED ON A WALL PANEL.

A4 IMP MULTIPLE CONDUIT HANGER

SCALE: NOT TO SCALE

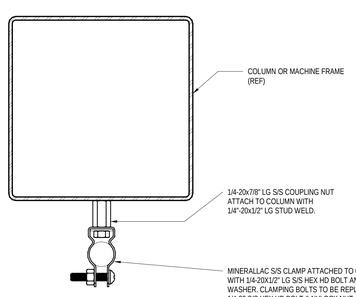

NOTES:
1. MINERALLAC STAINLESS STEEL PIPE/CONDUIT HANGERS:
   - 3/4" CONDUIT - PART NUMBER 1SB
   - 1" CONDUIT - PART NUMBER: 2SB
   - 1 1/4" CONDUIT - PART NUMBER: 3SB
   - 1 1/2" CONDUIT - PART NUMBER: 4SB
   - 2" CONDUIT HANGER PART NUMBER: 5SB

A5 SINGLE CONDUIT COLUMN MOUNTED

SCALE: NOT TO SCALE

OWNER

EST. 2007 Vital FARMS®

PROJECT INFORMATION

VITAL FARMS
EGG CENTRAL 2
SEYMOUR,IN

stellar
TAKING SOLUTIONS FURTHER

OPERATING AS:
THE STELLAR GROUP
2900 HARTLEY ROAD, JACKSONVILLE, FL, 32257 (904) 260-2900
WWW.STELLAR.NET

SEAL

Professional certification. I hereby certify that these documents were prepared or approved by me, and that I am a duly licensed professional architect/engineer under the laws of the state of IN .

CONSULTANT

The Stellar Group, Inc.
All rights reserved. No part of this work may be used, reproduced, distributed, displayed, or otherwise communicated in any form or by any means without the prior written consent of The Stellar Group, Inc.

REVISIONS

NO.	DESCRIPTION	DATE
A	REVISED FOR BID	02/06/2026
B	GMP ISSUE	04/02/2026

DATE ISSUED:	12/12/2025
DESIGNED BY:	EJT
REVIEWED BY:	MAM
A/EOR:	
PROJECT NUMBER:	07645

SHEET TITLE

CONDUIT SUPPORTS

SHEET ID

DT5000

4/3/2026 1:45:44 AM Autodesk Docs://07645_Vital Farms Egg Central Station 2/07645_VF EGG STA 2_D_R23.rvt