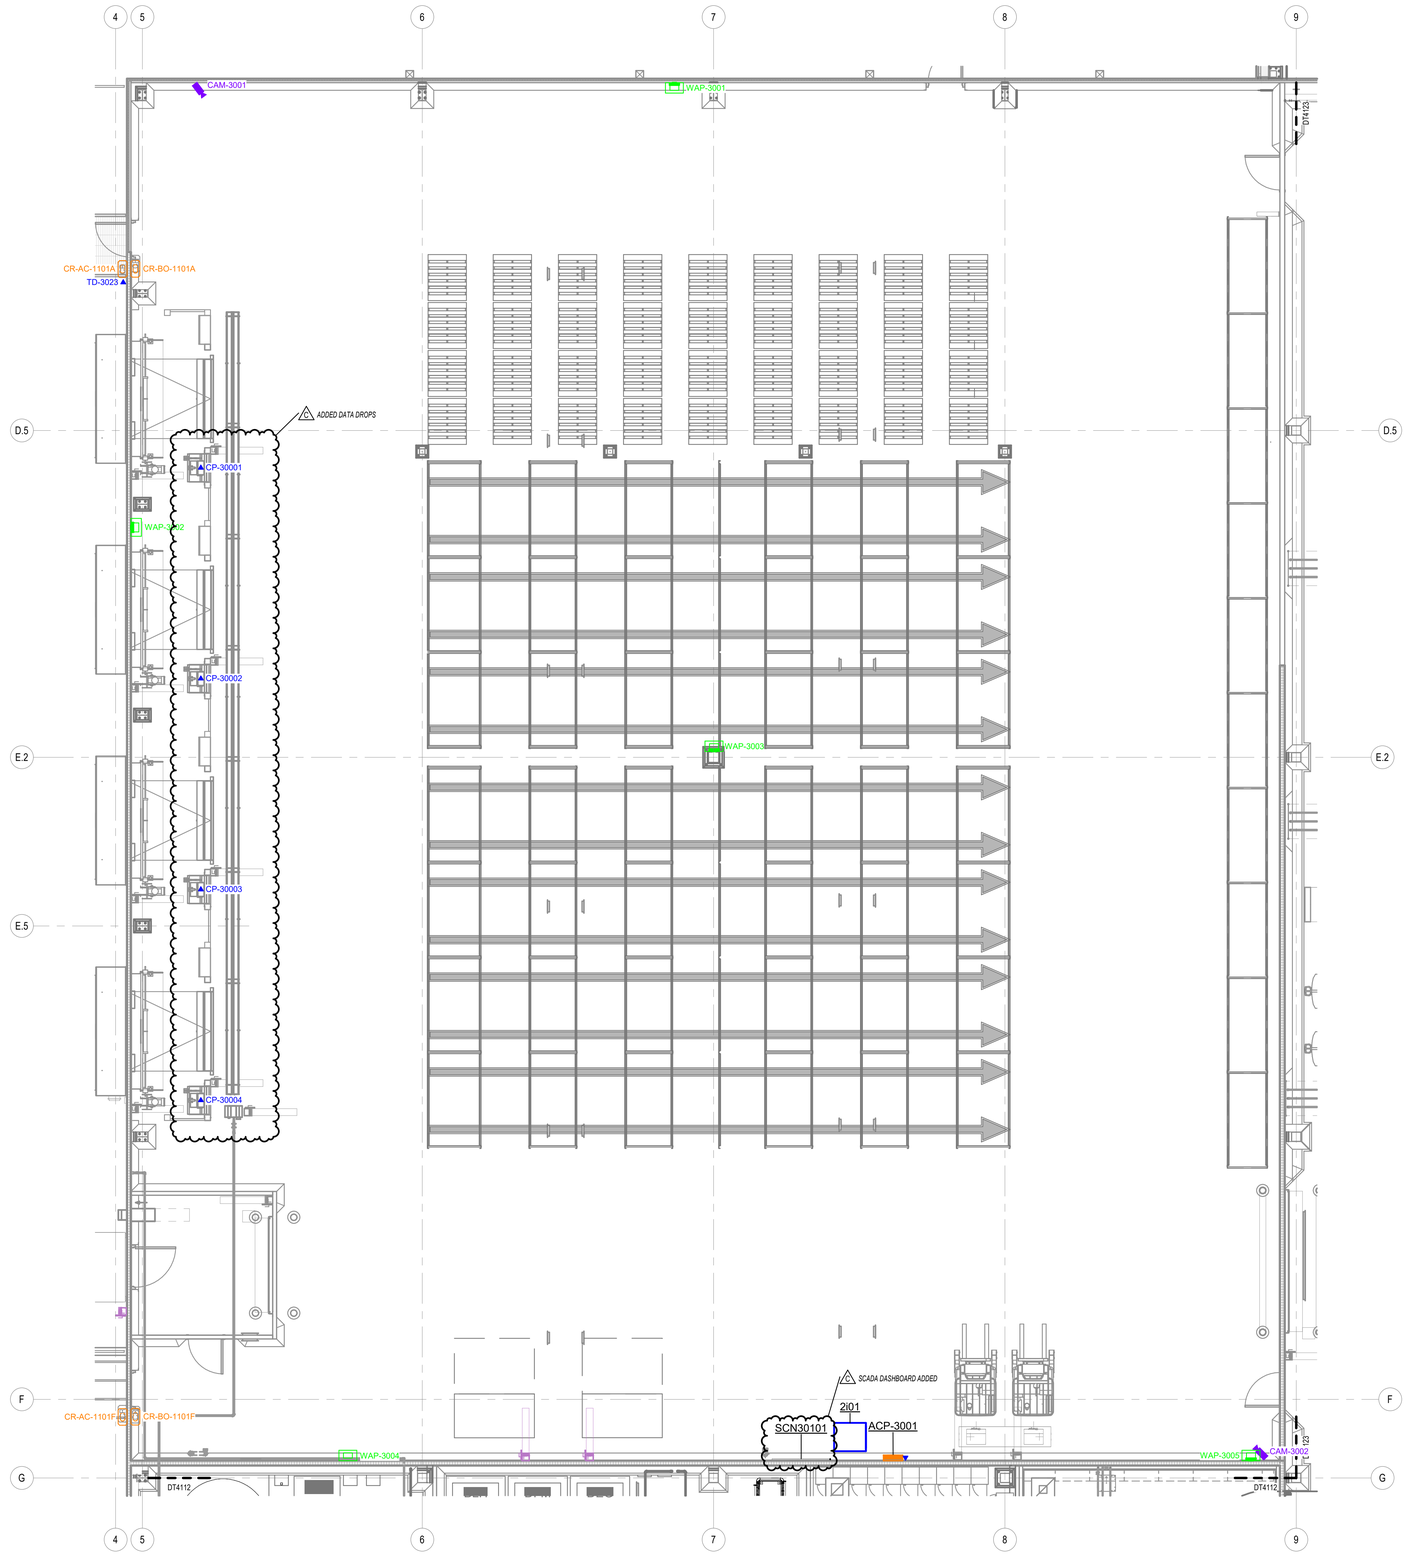

A1 ENLARGED PROCESS TELECOM 1ST FLOOR PLAN, AREA 1 SECTOR 1

SCALE: 3/16" = 1'-0"

0' 4' 8' 12' 16'

TELECOMM / DATA CONNECTION SCHEDULE

EQUIPMENT ID	EQUIPMENT DESCRIPTION	IDF	SWITCH / PORT
ACP-3001	ACCESS CONTROL PANEL	2I01	2I01IT-SW01_10
CAM-3001	CAMERA	2I01	2I01IT-SW01_1
CAM-3002	CAMERA	2I01	2I01IT-SW01_2
CP-30001	DOCK LEVELER CONTROL PANEL - DRY GOODS DOCK 1101K	2I01	2I01IT-SW01_11
CP-30002	DOCK LEVELER CONTROL PANEL - DRY GOODS DOCK 1101J	2I01	2I01IT-SW01_12
CP-30003	DOCK LEVELER CONTROL PANEL - DRY GOODS DOCK 1101H	2I01	2I01IT-SW01_13
CP-30004	DOCK LEVELER CONTROL PANEL - DRY GOODS DOCK 1101G	2I01	2I01IT-SW01_14
SCN30101	SCADA DASHBOARD	2I01	2I01IT-SW01_9
TD-3023	DRY GOODS DOCK ENTRANCE INTERCOM	2I01	2I01IT-SW01_8
WAP-3001	WIRELESS ACCESS POINT	2I01	2I01IT-SW01_3
WAP-3002	WIRELESS ACCESS POINT	2I01	2I01IT-SW01_4
WAP-3003	WIRELESS ACCESS POINT	2I01	2I01IT-SW01_5
WAP-3004	WIRELESS ACCESS POINT	2I01	2I01IT-SW01_6
WAP-3005	WIRELESS ACCESS POINT	2I01	2I01IT-SW01_7

Grand total: 14

ACCESS CONTROL CONNECTION SCHEDULE

EQUIPMENT ID	EQUIPMENT DESCRIPTION	FED FROM
CR-AC-1101A	CARD READER	ACP-3001_1
CR-AC-1101F	CARD READER	ACP-3001_2
CR-BO-1101A	EMPLOYEE BADGE OUT	ACP-3001_14
CR-BO-1101F	EMPLOYEE BADGE OUT	ACP-3001_12

Grand total: 4

NOTES

1. ALL NETWORK DROPS SHALL BE TAGGED ON BOTH ENDS OF CABLE WITH "FROM / TO" FORMAT WITH BRADY B-427 ROTATING VINYL WIRE LABELS. (EX. 2I01IT-SW01_24 / TD-1001)



KEY PLAN

SECTORS

N

OWNER

PROJECT INFORMATION

VITAL FARMS
EGG CENTRAL 2
SEYMOUR,IN

stellar
TAKING SOLUTIONS FURTHER

OPERATING AS:
THE STELLAR GROUP
2900 HARTLEY ROAD, JACKSONVILLE, FL 32257 (904) 260-2900
WWW.STELLAR.NET

SEAL

Professional certification. I hereby certify that these documents were prepared or approved by me, and that I am a duly licensed professional architect/engineer under the laws of the state of IN.

CONSULTANT

The Stellar Group, Inc.
All rights reserved. No part of this work may be used, reproduced, distributed, displayed, or otherwise communicated in any form or by any means without the prior written consent of The Stellar Group, Inc.

REVISIONS

NO.	DESCRIPTION	DATE
A	ISSUED FOR BID	01/16/2026
B	REVISED FOR BID	02/06/2026
C	GMP ISSUE	04/02/2026

DATE ISSUED:	XX/XX/XXXX
DESIGNED BY:	KDK
REVIEWED BY:	MAM
A/E/OR:	
PROJECT NUMBER:	07645

SHEET TITLE

PROCESS TELECOM 1ST FLOOR PLAN, AREA 1 SECTOR 1

SHEET ID

DT4111

PRINT IN COLOR

4/3/2026 2:07:15 AM Autodesk Docs://07645_Vitali Farms Egg Central Station 2/07645_VF EGG STA 2_D_R23.rvt