TELECOMM / DATA CONNECTION SCHEDULE

EQUIPMENT ID	EQUIPMENT DESCRIPTION	IDF	SWITCH / PORT
CAM-7003	DUAL CAMERA	2M11	2M11CS-SW01_6
CAM-7005	CAMERA	2M11	2M11CS-SW01_11
CAM-7006	CAMERA	2M11	2M11CS-SW01_12
CAM-7008	CAMERA	2M11	2M11CS-SW01_14
SCN70101	SCADA DASHBOARD	2M11	2M11OT-SW01_6
TC70003	TIME CLOCK	2M11	2M11IT-SW01_34
TC70004	TIME CLOCK	2M11	2M11IT-SW01_35
TD-7010	TWO (2) RJ45 DATA JACKS	2M11	2M11IT-SW01_16
TD-7011	TWO (2) RJ45 DATA JACKS	2M11	2M11IT-SW01_18
TD-7012	TWO (2) RJ45 DATA JACKS	2M11	2M11IT-SW01_20
TD-7013	TWO (2) RJ45 DATA JACKS	2M11	2M11IT-SW01_22
TD-7014	TWO (2) RJ45 DATA JACKS	2M11	2M11IT-SW01_24
TD-7015	TWO (2) RJ45 DATA JACKS	2M11	2M11IT-SW01_26
TD-7016	TWO (2) RJ45 DATA JACKS	2M11	2M11IT-SW01_28
TD-7017	TWO (2) RJ45 DATA JACKS	2M11	2M11IT-SW01_30
WAP-7002	WIRELESS ACCESS POINT	2M11	2M11IT-SW01_2
WAP-7003	WIRELESS ACCESS POINT	2M11	2M11IT-SW01_3
WAP-7005	WIRELESS ACCESS POINT	2M11	2M11IT-SW01_5

Grand total: 18

ACCESS CONTROL CONNECTION SCHEDULE

EQUIPMENT ID	EQUIPMENT DESCRIPTION	FED FROM
CR-AC-1205A	CARD READER	ACP-7001_10
CR-AC-1221A	CARD READER	ACP-7001_8
CR-BO-1221B	EMPLOYEE BADGE OUT	ACP-7001_9

Grand total: 3

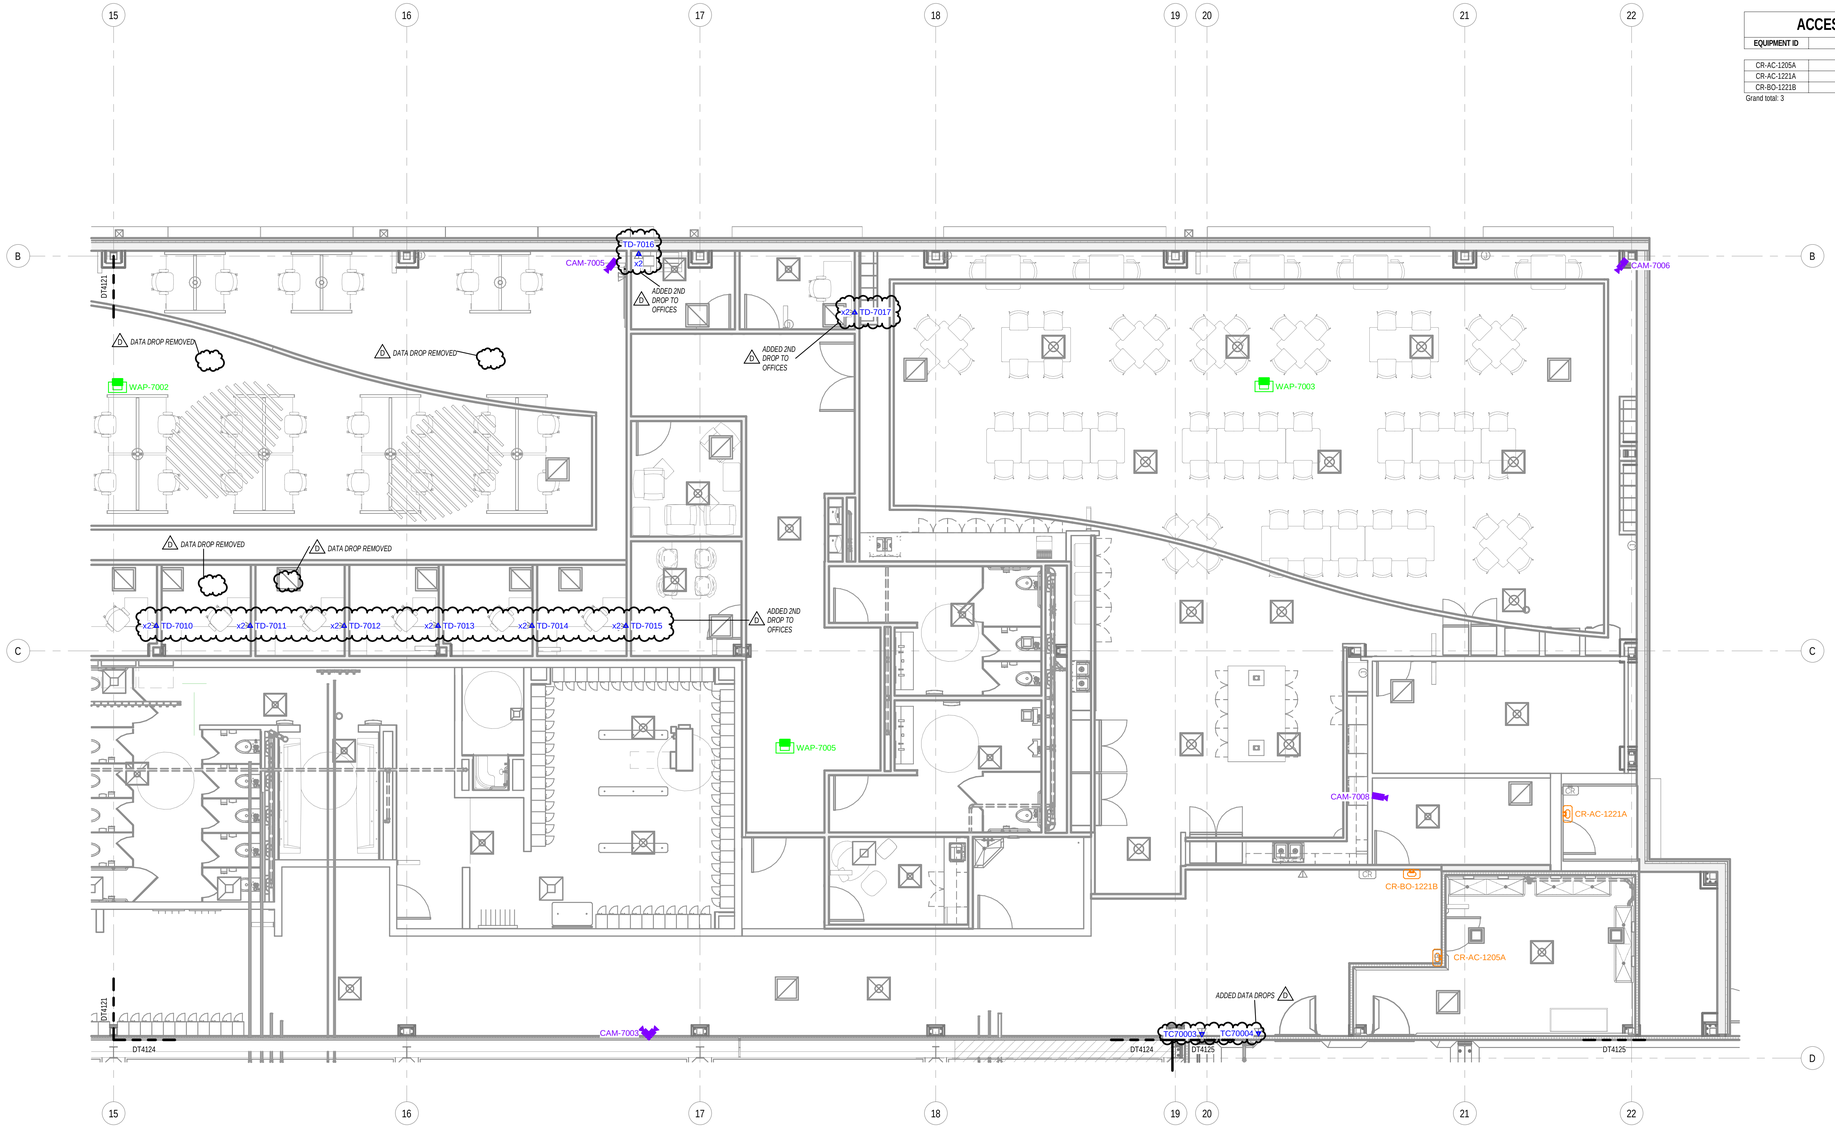

A1 ENLARGED PROCESS TELECOM 1ST FLOOR PLAN, AREA 2 SECTOR 2

SCALE: 3/16" = 1'-0"

0' 4' 8' 12' 16'

NOTES

1. ALL NETWORK DROPS SHALL BE TAGGED ON BOTH ENDS OF CABLE WITH "FROM / TO" FORMAT WITH BRADY B-427 ROTATING VINYL WIRE LABELS. (EX. 2001IT-SW01_24 / TD-1001)
2. DATA DROPS MARKED WITH x2 SHALL BE DESIGNATED A / B TOP TO BOTTOM



KEY PLAN

SECTORS

N

OWNER

PROJECT INFORMATION

VITAL FARMS
EGG CENTRAL 2
SEYMOUR,IN

stellar
TAKING SOLUTIONS FURTHER

OPERATING AS:
THE STELLAR GROUP
2900 HARTLEY ROAD, JACKSONVILLE, FL, 32257 (904) 260-2900
WWW.STELLAR.NET

SEAL

Professional certification. I hereby certify that these documents were prepared or approved by me, and that I am a duly licensed professional architect/engineer under the laws of the state of IN.

CONSULTANT

The Stellar Group, Inc.
All rights reserved. No part of this work may be used, reproduced, distributed, displayed, or otherwise communicated in any form or by any means without the prior written consent of The Stellar Group, Inc.

REVISIONS

NO.	DESCRIPTION	DATE
A	DESIGN DEVELOPMENT 2	12/12/2025
B	ISSUED FOR BID	01/16/2026
C	REVISED FOR BID	02/06/2026
D	GMP ISSUE	04/02/2026

DATE ISSUED:	12/12/2025
DESIGNED BY:	EJT
REVIEWED BY:	MAM
A/E/OR:	
PROJECT NUMBER:	07645

SHEET TITLE

PROCESS TELECOM 1ST FLOOR PLAN, AREA 2 SECTOR 2

SHEET ID

DT4122

PRINT IN COLOR

4/3/2026 1:07:34 AM Autodesk Docs://07645_Vital Farms Egg Central Station 2/07645_VF-EGG-STA-2_D_R23.rvt