NOTES

1. ALL NETWORK DROPS SHALL BE TAGGED ON BOTH ENDS OF CABLE WITH "FROM / TO" FORMAT WITH BRADY B-427 ROTATING VINYL WIRE LABELS. (EX. 201IT-SW01_24 / TD-1001)

2. DATA DROPS MARKED WITH x2 SHALL BE DESIGNATED A / B TOP TO BOTTOM

TELECOMM / DATA CONNECTION SCHEDULE

EQUIPMENT ID	EQUIPMENT DESCRIPTION	IDF	SWITCH / PORT
3GEN1	EMERGENCY GENERATOR	206	206OT-SW01_6
3GEN1	EMERGENCY GENERATOR	206	206OT-SW01_7
3HMSB	SWITCHBOARD - ELECTRICAL 1310	206	206IT-SW01_14
3UPS031	UPS - ELECTRICAL 1310	206	206IT-SW01_26
ACP-1001	ACCESS CONTROL PANEL	206	206IT-SW01_15
CAM-1005	CAMERA	206	206CS-SW01_10
CAM-1006	CAMERA	206	206CS-SW01_11
HMI10101	SCADA HMI	206	206OT-SW01_5
PNL10005	VERTICAL CONVEYOR PANEL	206	206OT-SW01_4
SCN10103	SCADA DASHBOARD	206	206OT-SW01_14
SCN10104	SCADA DASHBOARD	206	206OT-SW01_13
TD-1001	TWO (2) RJ45 DATA JACKS	206	206IT-SW01_9
TD-1002	TWO (2) RJ45 DATA JACKS	206	206IT-SW01_10
TD-1003	TWO (2) RJ45 DATA JACKS	206	206IT-SW01_11
TD-1004	TWO (2) RJ45 DATA JACKS	206	206IT-SW01_12
TD-1005	RJ45 DATA JACK	206	206IT-SW01_13
TV-1001	TRUCK LOUNGE TV / DISPLAY	206	206IT-SW01_8
WAP-1011	WIRELESS ACCESS POINT	206	206IT-SW01_3
WAP-1012	WIRELESS ACCESS POINT	206	206IT-SW01_4
WAP-1013	WIRELESS ACCESS POINT	206	206IT-SW01_5

Grand total: 20

ACCESS CONTROL CONNECTION SCHEDULE

EQUIPMENT ID	EQUIPMENT DESCRIPTION	FED FROM
CR-AC-1307A	CARD READER	ACP-1001_8
CR-AC-1307B	CARD READER	ACP-1001_6
CR-AC-1308A	CARD READER	ACP-1001_7
CR-AC-1308B	CARD READER	ACP-1001_3

Grand total: 4

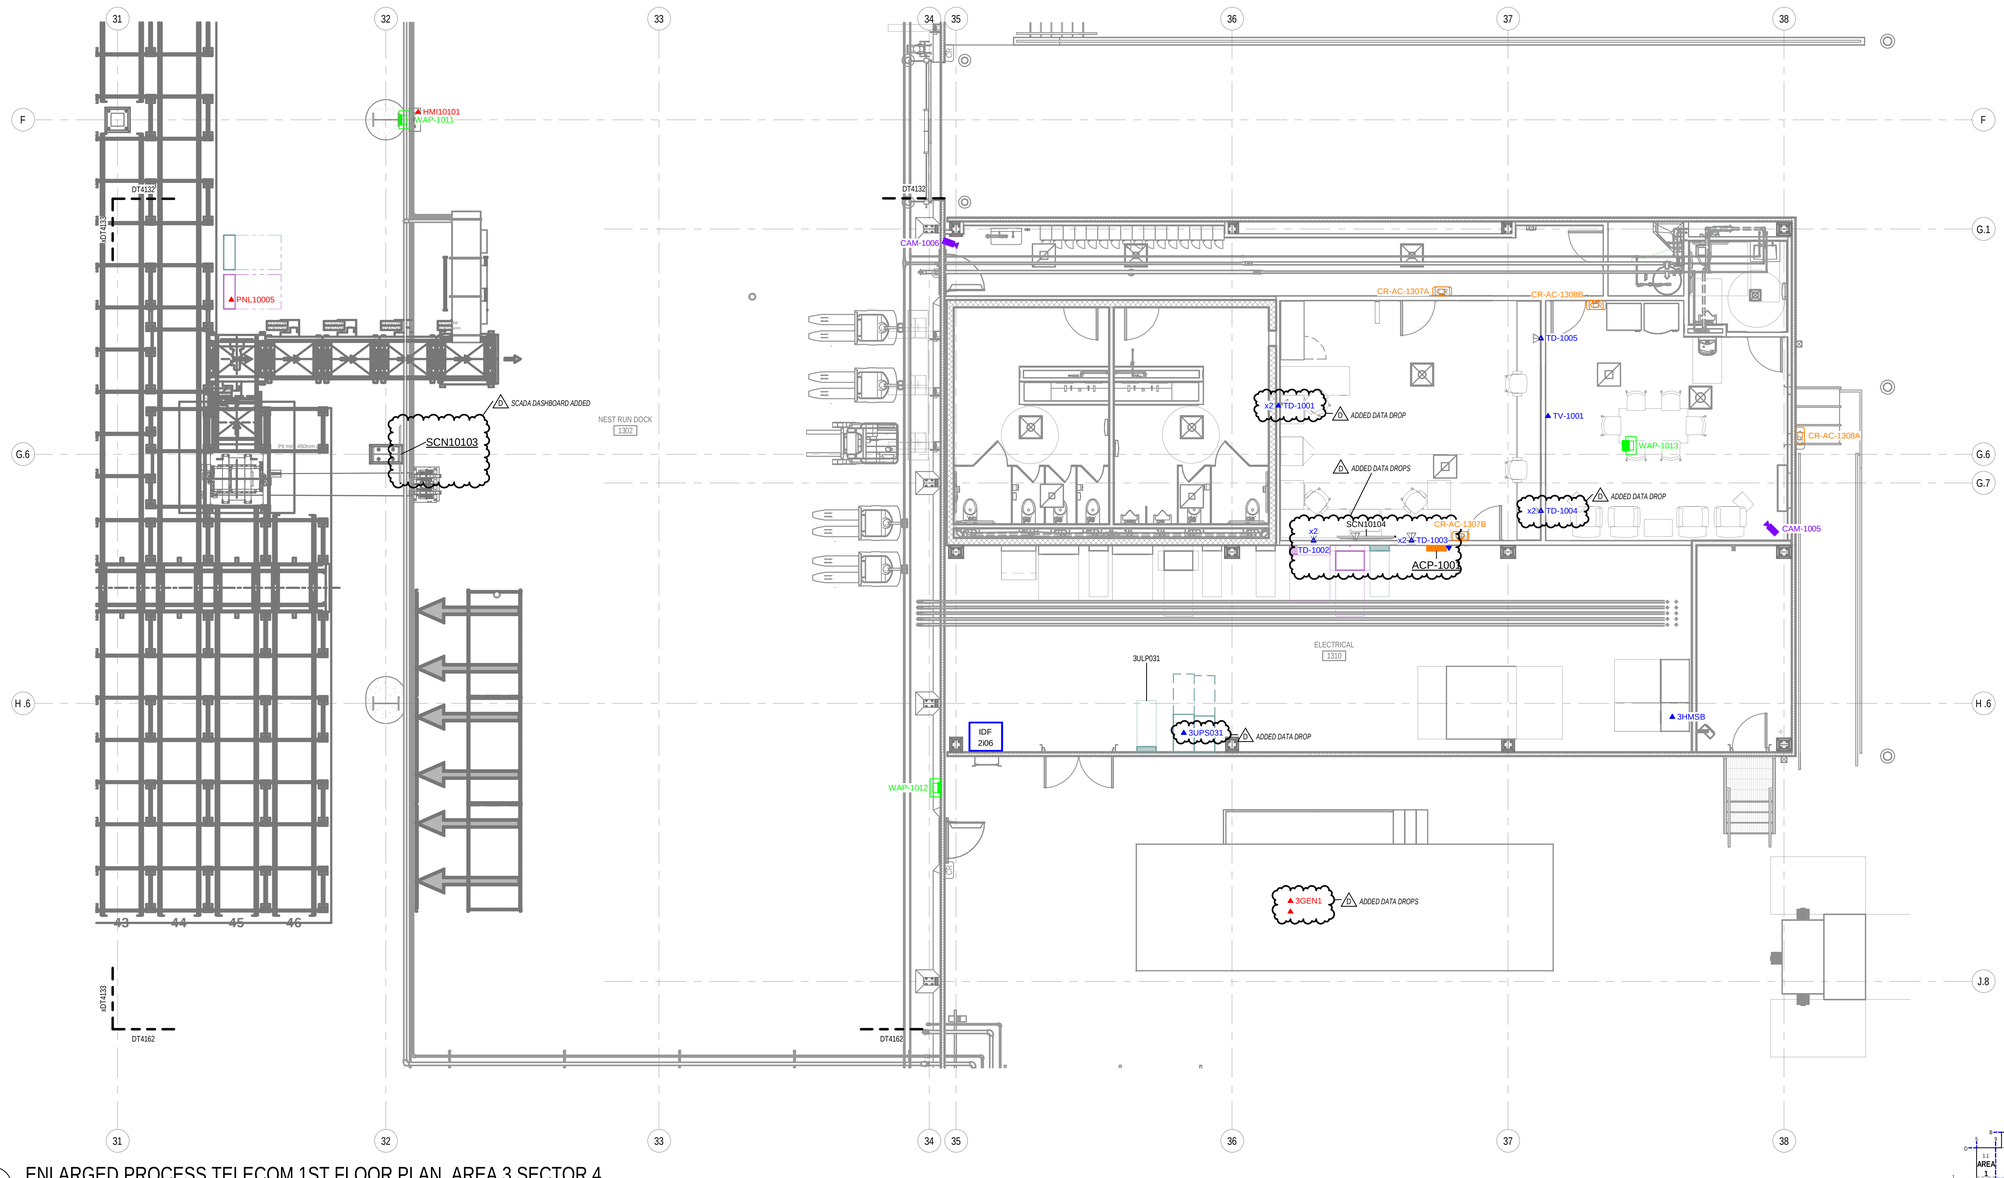

A1 ENLARGED PROCESS TELECOM 1ST FLOOR PLAN, AREA 3 SECTOR 4

SCALE: 3/16" = 1'-0"

0' 4' 8' 12' 16'



KEY PLAN

SECTORS

N

OWNER

PROJECT INFORMATION

VITAL FARMS EGG CENTRAL 2

SEYMOUR,IN

stellar TAKING SOLUTIONS FURTHER

OPERATING AS:
THE STELLAR GROUP
2900 HARTLEY ROAD, JACKSONVILLE, FL, 32257 (904) 260-2900
WWW.STELLAR.NET

SEAL

Professional certification. I hereby certify that these documents were prepared or approved by me, and that I am a duly licensed professional architect/engineer under the laws of the state of IN.

CONSULTANT

The Stellar Group, Inc.
All rights reserved. No part of this work may be used, reproduced, distributed, displayed, or otherwise communicated in any form or by any means without the prior written consent of The Stellar Group, Inc.

REVISIONS

NO.	DESCRIPTION	DATE
A	DESIGN DEVELOPMENT 2	12/12/2025
B	ISSUED FOR BID	01/16/2026
C	REVISED FOR BID	02/06/2026
D	GMP ISSUE	04/02/2026

DATE ISSUED:	12/12/2025
DESIGNED BY:	EJT
REVIEWED BY:	MAM
A/E/OR:	
PROJECT NUMBER:	07645

SHEET TITLE

PROCESS TELECOM 1ST FLOOR PLAN, AREA 3 SECTOR 4

SHEET ID

DT4134

PRINT IN COLOR

4/3/2026 1:10:28 AM Autodesk Docs://07645_Vital Farms Egg Central Station 2/07645_VF EGG STA 2_D_R23.rvt