TELECOMM / DATA CONNECTION SCHEDULE

EQUIPMENT ID	EQUIPMENT DESCRIPTION	IDF	SWITCH / PORT
CAM-3008	QUAD CAMERA	2M21	2M21CS-SW01_20
CPU-3001	MAINTENANCE ROOM COMPUTER	2M21	2M21IT-SW01_14
CPU-3002	MAINTENANCE ROOM COMPUTER	2M21	2M21IT-SW01_15
SCN30102	SCADA DASHBOARD	2M21	2M21IT-SW01_18
TD-3004	TWO (2) RJ45 DATA JACKS	2M21	2M21IT-SW01_21
TD-3005	RJ45 DATA JACK	2M21	2M21IT-SW01_22
TD-3006	RJ45 DATA JACK	2M21	2M21OT-SW03_16
TD-3007	TWO (2) RJ45 DATA JACKS	2M21	2M21IT-SW01_23
TD-3008	RJ45 DATA JACK	2M21	2M21IT-SW01_24
TD-3009	RJ45 DATA JACK	2M21	2M21OT-SW03_17
TD-3010	TWO (2) RJ45 DATA JACKS	2M21	2M21IT-SW01_25
TV-3001	MAINTENANCE ROOM TV / DISPLAY	2M21	2M21IT-SW01_16
TV-3002	MAINTENANCE ROOM TV / DISPLAY	2M21	2M21IT-SW01_17
WAP-3006	WIRELESS ACCESS POINT	2M21	2M21IT-SW01_1

Grand total: 14

ACCESS CONTROL CONNECTION SCHEDULE

EQUIPMENT ID	EQUIPMENT DESCRIPTION	FED FROM
CR-AC-1408A	CARD READER	ACP-3001_10
CR-AC-1409B	CARD READER	ACP-3001_9

Grand total: 2

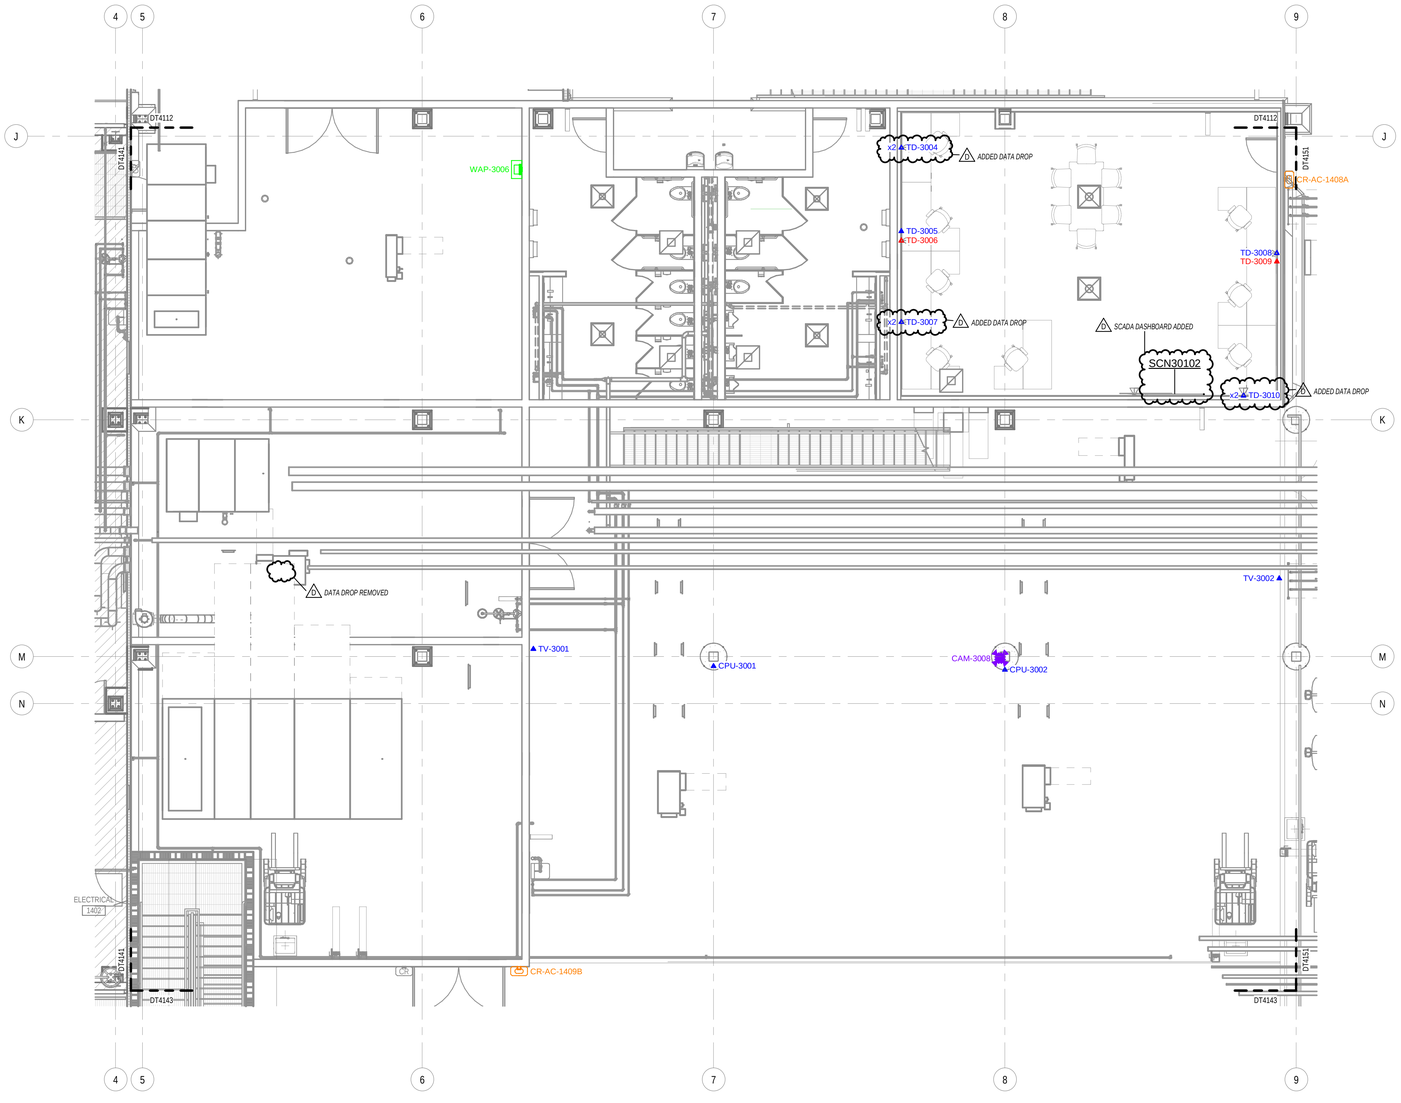

A1 ENLARGED PROCESS TELECOM 1ST FLOOR PLAN, AREA 4 SECTOR 2

SCALE: 3/16" = 1'-0"

0' 4' 8' 12' 16'

NOTES

1. ALL NETWORK DROPS SHALL BE TAGGED ON BOTH ENDS OF CABLE WITH "FROM / TO" FORMAT WITH BRADY B-427 ROTATING VINYL WIRE LABELS. (EX. 2I01IT-SW01_24 / TD-1001)
2. DATA DROPS MARKED WITH x2 SHALL BE DESIGNATED A / B TOP TO BOTTOM



KEY PLAN

SECTORS

OWNER

PROJECT INFORMATION

VITAL FARMS
EGG CENTRAL 2
SEYMOUR,IN

OPERATING AS:
THE STELLAR GROUP
2900 HARTLEY ROAD, JACKSONVILLE, FL, 32257 (904) 260-2900
WWW.STELLAR.NET

SEAL

Professional certification. I hereby certify that these documents were prepared or approved by me, and that I am a duly licensed professional architect/engineer under the laws of the state of IN.

CONSULTANT

The Stellar Group, Inc.
All rights reserved. No part of this work may be used, reproduced, distributed, displayed, or otherwise communicated in any form or by any means without the prior written consent of The Stellar Group, Inc.

REVISIONS

NO.	DESCRIPTION	DATE
A	DESIGN DEVELOPMENT 2	12/12/2025
B	ISSUED FOR BID	01/16/2026
C	REVISED FOR BID	02/06/2026
D	GMP ISSUE	04/02/2026

DATE ISSUED:	12/12/2025
DESIGNED BY:	EJT
REVIEWED BY:	MAM
A/E/OR:	
PROJECT NUMBER:	07645

SHEET TITLE

PROCESS TELECOM 1ST FLOOR PLAN, AREA 4 SECTOR 2

SHEET ID

DT4142

PRINT IN COLOR

4/3/2026 1:11:06 AM Autodesk Docs://07645_Vital Farms Egg Central Station 2/07645_VF EGG STA 2_D_R23.rvt