CAMERA SCHEDULE

EQUIPMENT ID	MAKE	MODEL	DESCRIPTION	MOUNTING	IDF	SWITCH / PORT
CAM-3003	AXIS	P3287-LV	CAMERA - QUALITY CORRIDOR FIRST FLOOR	WALL	2M21	2M21CS-SW01_6
CAM-3005	AXIS	P3287-LV	CAMERA - 2ND FLOOR HALLWAY TO MDF 2	WALL	2M21	2M21CS-SW01_8
CAM-4006	AXIS	P3287-LV	CAMERA - 2ND FLOOR CASE SEALING 1	WALL	2M21	2M21CS-SW01_11
CAM-4007	AXIS	P3287-LV	CAMERA - 2ND FLOOR CASE SEALING 2	WALL	2M21	2M21CS-SW01_12
CAM-4008	AXIS	P3287-LV	CAMERA - 2ND FLOOR ACCUMULATION EQUIPMENT PLATFORM 1	WALL	2i03	2i03CS-SW01_10
CAM-4012	AXIS	P3287-LV	CAMERA - 2ND FLOOR ACCUMULATION EQUIPMENT PLATFORM 2	WALL	2i03	2i03CS-SW01_11
CAM-4013	AXIS	P3287-LV	CAMERA - 2ND FLOOR CASE SEALING STORAGE	WALL	2M21	2M21CS-SW01_13
CAM-6002	AXIS	P3287-LV	CAMERA - WEST ELECTRICAL ROOM	WALL	2M21	2M21CS-SW01_19

Grand total: 8

NOTES

1. ALL NETWORK DROPS SHALL BE TAGGED ON BOTH ENDS OF CABLE WITH "FROM / TO" FORMAT WITH BRADY B-427 ROTATING VINYL WIRE LABELS. (EX. 2001IT-SW01_24 / TD-1001)

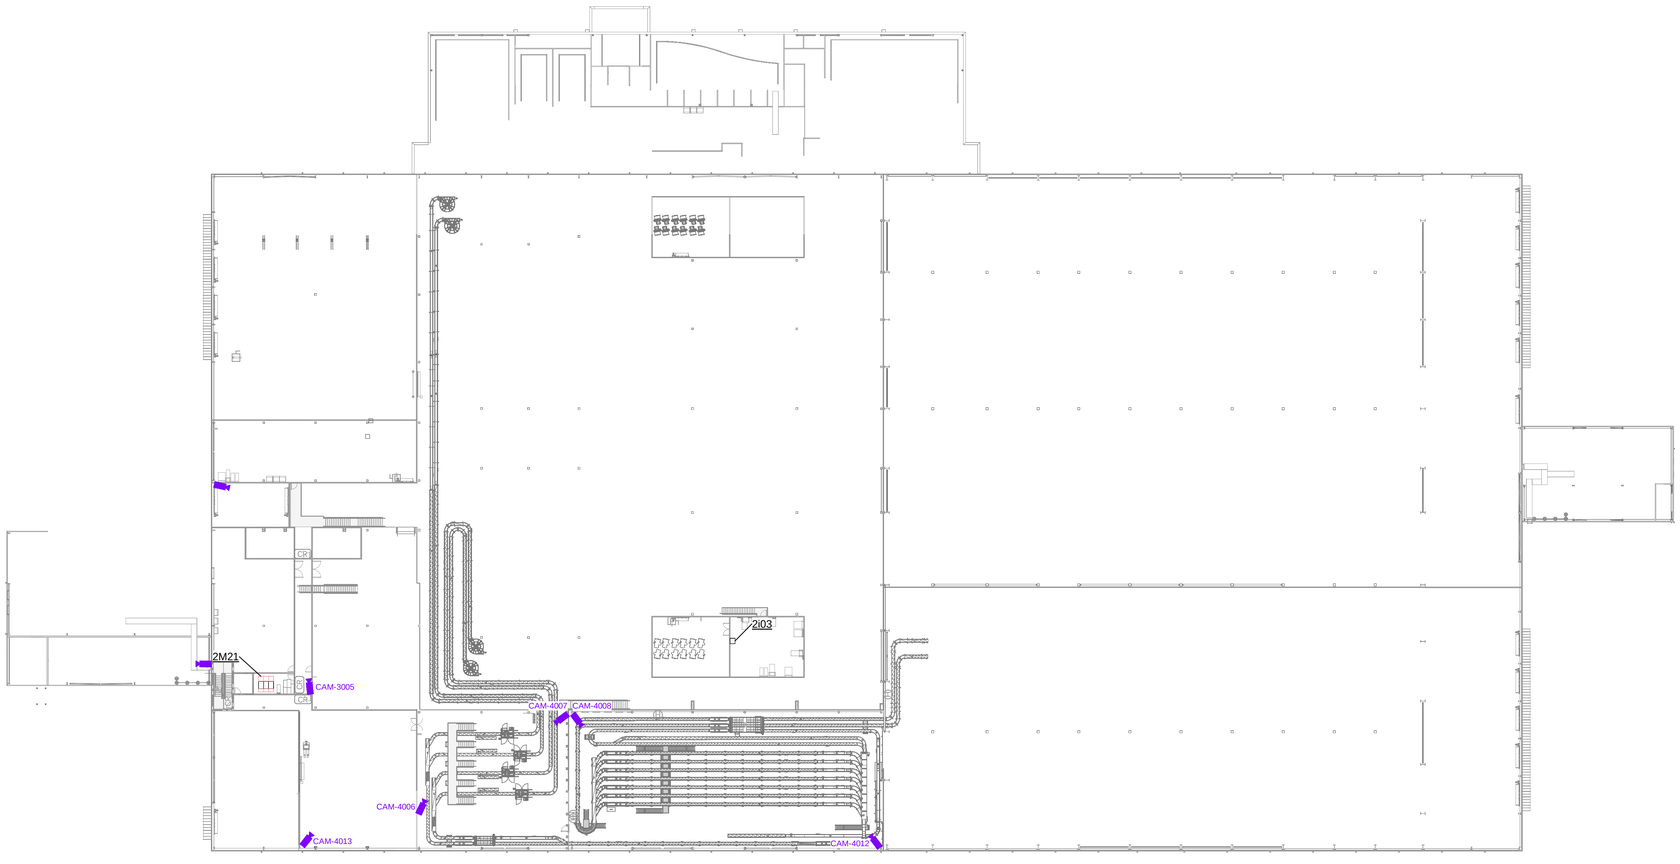

A1 OVERALL 2ND FLOOR CAMERA LOCATIONS

SCALE: 1" = 30'-0"

0' 15' 30' 60' 90'



KEY PLAN

SECTORS

OWNER

PROJECT INFORMATION

VITAL FARMS
EGG CENTRAL 2
SEYMOUR,IN

OPERATING AS:
THE STELLAR GROUP
2900 HARTLEY ROAD, JACKSONVILLE, FL, 32257 (904) 260-2900
WWW.STELLAR.NET

SEAL

Professional certification. I hereby certify that these documents were prepared or approved by me, and that I am a duly licensed professional architect/engineer under the laws of the state of IN.

CONSULTANT

The Stellar Group, Inc.
All rights reserved. No part of this work may be used, reproduced, distributed, displayed, or otherwise communicated in any form or by any means without the prior written consent of The Stellar Group, Inc.

REVISIONS

NO.	DESCRIPTION	DATE
A	DESIGN DEVELOPMENT 2	12/12/2025
B	ISSUED FOR BID	01/16/2026
C	REVISED FOR BID	02/06/2026
D	REVISED AS NOTED	03/10/2026
E	GMP ISSUE	04/02/2026

DATE ISSUED:	12/12/2025
DESIGNED BY:	ARS
REVIEWED BY:	CDS
A/EOR:	
PROJECT NUMBER:	07645

SHEET TITLE

PROCESS TELECOM
OVERALL 2ND FLOOR
CAMERA LOCATIONS

SHEET ID

DT1211

PRINT IN COLOR

4/3/2026 1:33:27 AM Autodesk Docs://07645_Vital Farms Egg Central Station 2/07645_VF EGG STA 2_D_R23.rvt