TELECOMM / DATA CONNECTION SCHEDULE

EQUIPMENT ID	EQUIPMENT DESCRIPTION	IDF	SWITCH / PORT
2UPS011	UPS - MDF1	2M11	2M11IT-SW01_37
ACP-7001	ACCESS CONTROL PANEL	2M11	2M11IT-SW01_36
CAM-7001	CAMERA	2M11	2M11CS-SW01_4
CAM-7002	DUAL CAMERA	2M11	2M11CS-SW01_5
CAM-7004	CAMERA	2M11	2M11CS-SW01_10
CAM-7007	CAMERA	2M11	2M11CS-SW01_13
CAM-7009	CAMERA	2M11	2M11CS-SW01_15
TC70001	TIME CLOCK	2M11	2M11IT-SW01_32
TC70002	TIME CLOCK	2M11	2M11IT-SW01_33
TD-7001	RJ45 DATA JACK	2M11	2M11IT-SW01_6
TD-7002	RJ45 DATA JACK	2M11	2M11IT-SW01_7
TD-7003	RJ45 DATA JACK	2M11	2M11IT-SW01_8
TD-7004	RJ45 DATA JACK	2M11	2M11IT-SW01_9
TD-7005	TWO (2) RJ45 DATA JACKS	2M11	2M11IT-SW01_10
TD-7008	TWO (2) RJ45 DATA JACKS	2M11	2M11IT-SW01_12
TD-7009	TWO (2) RJ45 DATA JACKS	2M11	2M11IT-SW01_14
WAP-7001	WIRELESS ACCESS POINT	2M11	2M11IT-SW01_1
WAP-7004	WIRELESS ACCESS POINT	2M11	2M11IT-SW01_4

Grand total: 19

ACCESS CONTROL CONNECTION SCHEDULE

EQUIPMENT ID	EQUIPMENT DESCRIPTION	FED FROM
CR-AC-1204A	CARD READER	ACP-7001_4
CR-AC-1206A	CARD READER	ACP-7001_3
CR-AC-1209A	CARD READER	ACP-7001_5
CR-AC-1242B	CARD READER	ACP-7001_1
CR-AC-1244A	CARD READER - IT ROOM	ACP-7001_13
CR-BO-1206B	EMPLOYEE BADGE OUT	ACP-7001_2

Grand total: 6

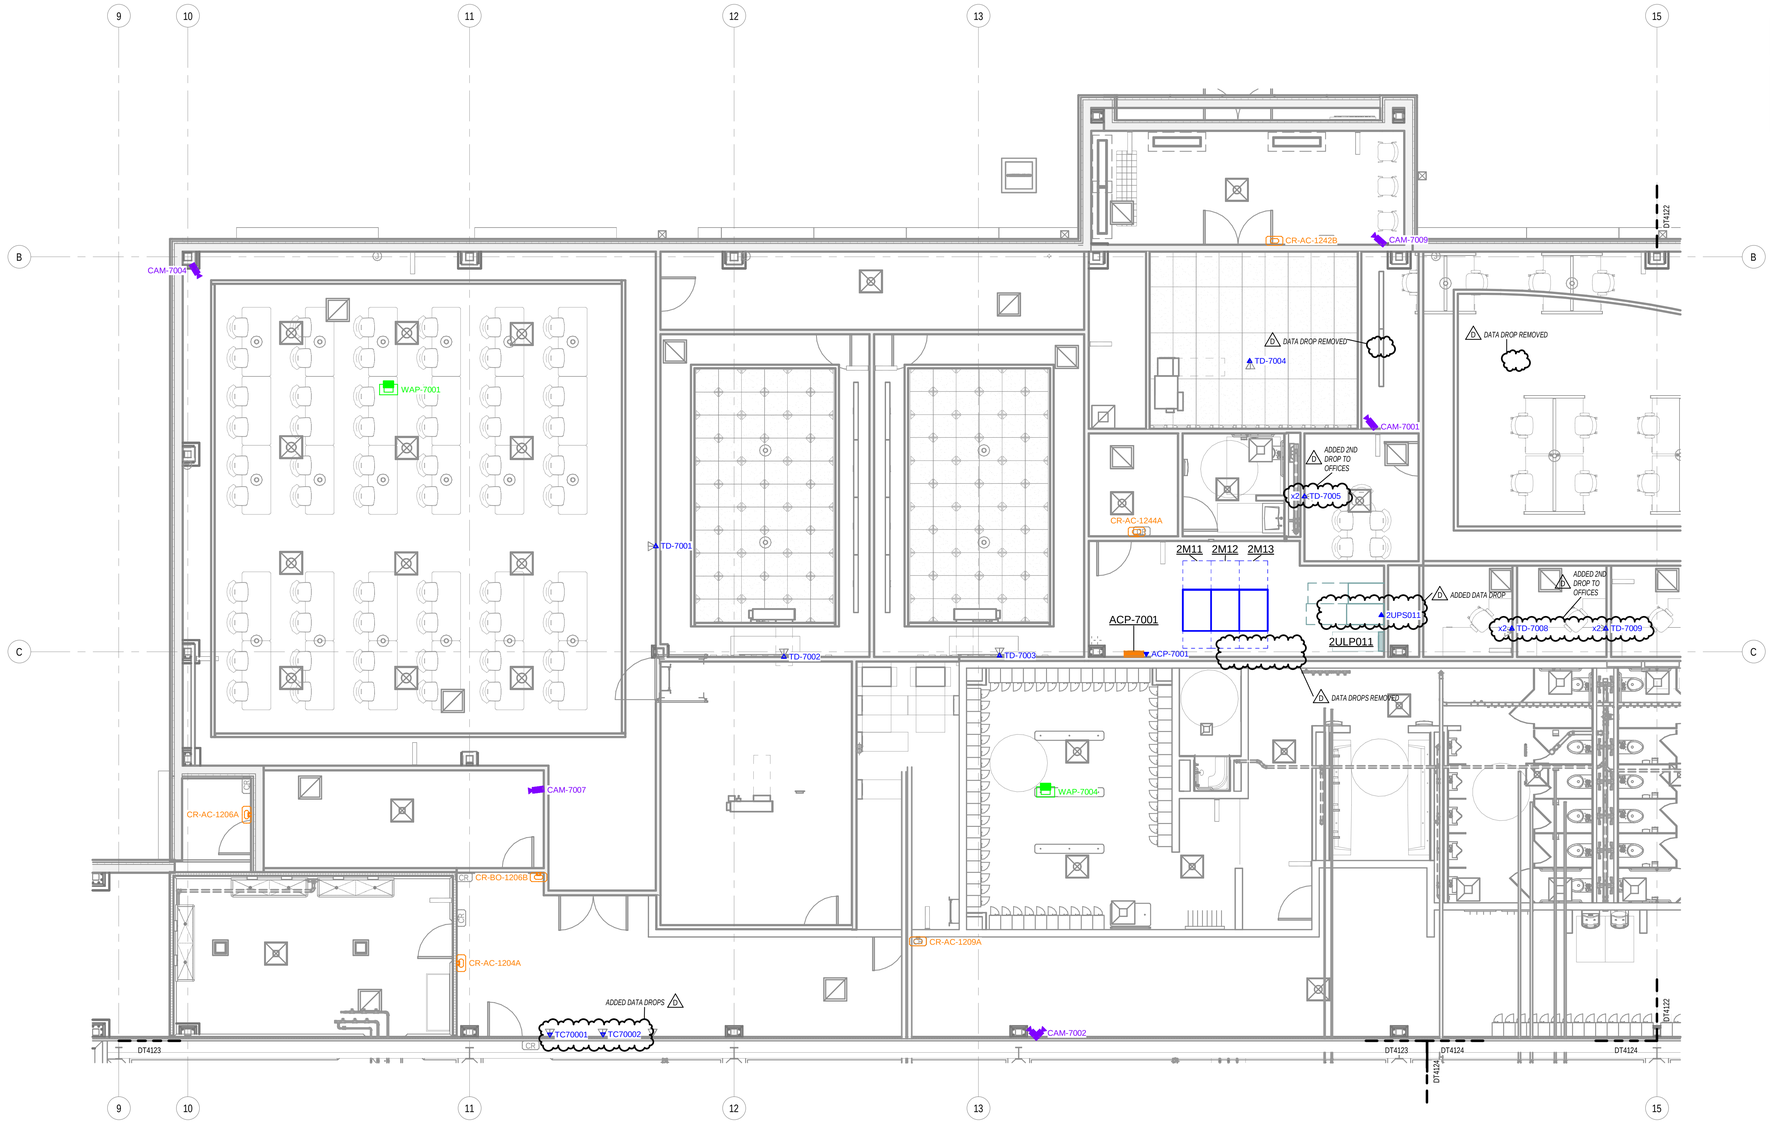

A1 ENLARGED PROCESS TELECOM 1ST FLOOR PLAN, AREA 2 SECTOR 1

SCALE: 3/16" = 1'-0"

0' 4' 8' 12' 16'

NOTES

1. ALL NETWORK DROPS SHALL BE TAGGED ON BOTH ENDS OF CABLE WITH "FROM / TO" FORMAT WITH BRADY B-427 ROTATING VINYL WIRE LABELS. (EX. 2001IT-SW01_24 / TD-1001)
2. DATA DROPS MARKED WITH x2 SHALL BE DESIGNATED A / B TOP TO BOTTOM

KEY PLAN

SECTORS

N

OWNER

PROJECT INFORMATION

VITAL FARMS
EGG CENTRAL 2
SEYMOUR,IN

stellar
TAKING SOLUTIONS FURTHER

OPERATING AS:
THE STELLAR GROUP
2900 HARTLEY ROAD, JACKSONVILLE, FL, 32257 (904) 260-2900
WWW.STELLAR.NET

SEAL

Professional certification. I hereby certify that these documents were prepared or approved by me, and that I am a duly licensed professional architect/engineer under the laws of the state of IN.

CONSULTANT

The Stellar Group, Inc.
All rights reserved. No part of this work may be used, reproduced, distributed, displayed, or otherwise communicated in any form or by any means without the prior written consent of The Stellar Group, Inc.

REVISIONS

NO.	DESCRIPTION	DATE
A	DESIGN DEVELOPMENT 2	12/12/2025
B	ISSUED FOR BID	01/16/2026
C	REVISED FOR BID	02/06/2026
D	GMP ISSUE	04/02/2026

DATE ISSUED:	12/12/2025
DESIGNED BY:	EJT
REVIEWED BY:	MAM
A/E/OR:	
PROJECT NUMBER:	07645

SHEET TITLE

PROCESS TELECOM 1ST FLOOR PLAN, AREA 2 SECTOR 1

SHEET ID

DT4121

PRINT IN COLOR

4/3/2026 1:07:19 AM Autodesk Docs://07645_Vital Farms Egg Central Station 2/07645_VF EGG STA 2_D_R23.rvt