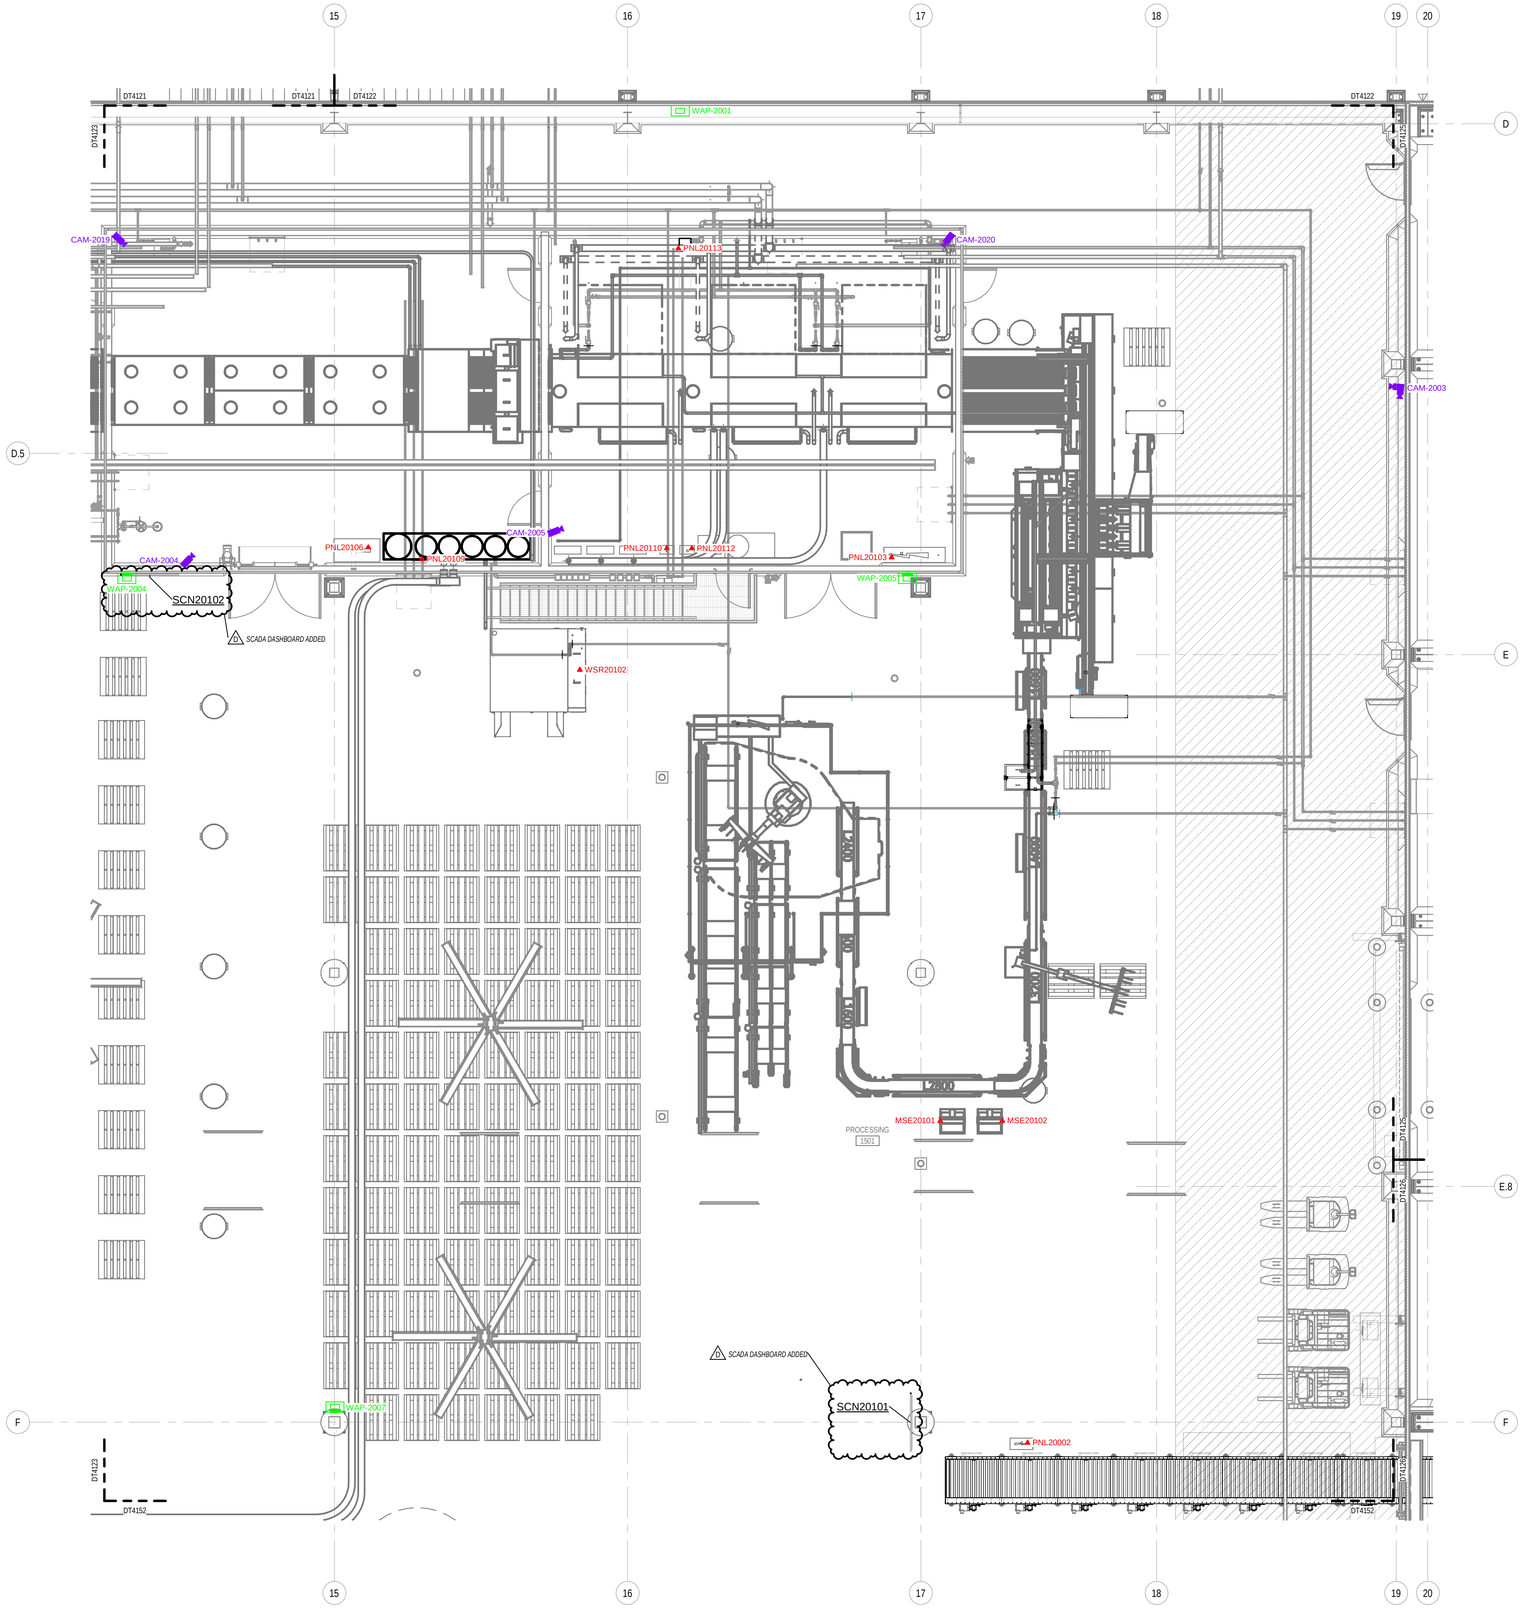

A1 ENLARGED PROCESS TELECOM 1ST FLOOR PLAN, AREA 2 SECTOR 4

SCALE: 3/16" = 1'-0"

0' 4' 8' 12' 16'

TELECOMM / DATA CONNECTION SCHEDULE

EQUIPMENT ID	EQUIPMENT DESCRIPTION	IDF	SWITCH / PORT
CAM-2003	DUAL CAMERA	2I02	2I02CS-SW01_3
CAM-2004	CAMERA	2I02	2I02CS-SW01_4
CAM-2005	CAMERA	2I02	2I02CS-SW01_5
CAM-2019	CAMERA	2I02	2I02CS-SW01_7
CAM-2020	CAMERA	2I02	2I02CS-SW01_8
MSE20101	OPERATOR STATION	2I02	2I02OT-SW01_16
MSE20102	OPERATOR STATION	2I02	2I02OT-SW01_17
PNL20002	TEMPERING PALLET CONVEYORS PANEL	2I02	2I02OT-SW01_1
PNL20103	EGG WASHER CONTROL PANEL	2I02	2I02OT-SW01_4
PNL20106	EGG DRYER CONTROL PANEL	2I02	2I02OT-SW01_2
PNL20109	WALCHEM I-9 CONTROLLER	2I02	2I02OT-SW01_3
PNL20110	EGG WASH DOSING CONTROL BOX	2I02	2I02OT-SW01_8
PNL20112	CIP DOSING CONTROL BOX	2I02	2I02OT-SW01_9
PNL20113	PROCESS DATA PANEL	2I02	2I02OT-SW01_10
SCN20101	SCADA DASHBOARD	2I02	2I02OT-SW01_20
SCN20102	SCADA DASHBOARD	2I02	2I02OT-SW01_21
WAP-2001	WIRELESS ACCESS POINT	2I02	2I02IT-SW01_1
WAP-2004	WIRELESS ACCESS POINT	2I02	2I02IT-SW01_4
WAP-2005	WIRELESS ACCESS POINT	2I02	2I02IT-SW01_5
WAP-2007	WIRELESS ACCESS POINT	2I02	2I02IT-SW01_7
WSR20102	PARTS WASHER	2I02	2I02OT-SW01_29

Grand total: 21

NOTES

1. ALL NETWORK DROPS SHALL BE TAGGED ON BOTH ENDS OF CABLE WITH "FROM / TO" FORMAT WITH BRADY B-427 ROTATING VINYL WIRE LABELS. (EX. 2I01IT-SW01_24 / TD-1001)



KEY PLAN

SECTORS

N

OWNER

PROJECT INFORMATION

VITAL FARMS
EGG CENTRAL 2
SEYMOUR,IN

OPERATING AS:
THE STELLAR GROUP
2900 HARTLEY ROAD, JACKSONVILLE, FL, 32257 (904) 260-2900
WWW.STELLAR.NET

SEAL

Professional certification. I hereby certify that these documents were prepared or approved by me, and that I am a duly licensed professional architect/engineer under the laws of the state of IN.

CONSULTANT

The Stellar Group, Inc.
All rights reserved. No part of this work may be used, reproduced, distributed, displayed, or otherwise communicated in any form or by any means without the prior written consent of The Stellar Group, Inc.

REVISIONS

NO.	DESCRIPTION	DATE
A	DESIGN DEVELOPMENT 2	12/12/2025
B	ISSUED FOR BID	01/16/2026
C	REVISED FOR BID	02/06/2026
D	GMP ISSUE	04/02/2026

DATE ISSUED: 12/12/2025
DESIGNED BY: EJT
REVIEWED BY: MAM
A/E/OR:
PROJECT NUMBER: 07645

SHEET TITLE

PROCESS TELECOM 1ST FLOOR PLAN, AREA 2 SECTOR 4

SHEET ID

DT4124

PRINT IN COLOR

4/3/2026 1:08:35 AM Autodesk Docs://07645_Vital Farms Egg Central Station 2/07645_VF EGG ST'A 2_D_R23.rvt