## TELECOMM / DATA CONNECTION SCHEDULE

| EQUIPMENT ID | EQUIPMENT DESCRIPTION | IDF | SWITCH / PORT |
|---|---|---|---|
| CAM-3004 | CAMERA | 2M21 | 2M21CS-SW01_7 |
| CAM-5001 | CAMERA | 2M21 | 2M21CS-SW01_14 |
| CAM-5002 | CAMERA | 2M21 | 2M21CS-SW01_15 |
| CAM-5003 | CAMERA | 2M21 | 2M21CS-SW01_16 |
| CP-50001 | DOCK LEVELER CONTROL PANEL - PALLET / TRAY KITTING 1413C | 2M21 | 2M21IT-SW01_42 |
| PNL50000 | PROCESS DATA PANEL | 2M21 | 2M21OT-SW03_10 |
| PNL50004 | TRAY WASHER CONTROL PANEL | 2M21 | 2M21OT-SW03_5 |
| PNL50006 | TRAY WASHER CONTROL PANEL | 2M21 | 2M21OT-SW03_6 |
| PNL50008 | TRAY WASHER CONTROL PANEL | 2M21 | 2M21OT-SW03_7 |
| PNL50010 | WASHER DOSING CONTROL BOX | 2M21 | 2M21OT-SW03_8 |
| PNL50011 | WALCHEM I-9 CONTROLLER | 2M21 | 2M21OT-SW03_9 |
| SCN50101 | SCADA DASHBOARD | 2M21 | 2M21IT-SW01_43 |
| WAP-3007 | WIRELESS ACCESS POINT | 2M21 | 2M21IT-SW01_2 |
| WAP-5001 | WIRELESS ACCESS POINT | 2M21 | 2M21IT-SW01_7 |
| WAP-5002 | WIRELESS ACCESS POINT | 2M21 | 2M21IT-SW01_8 |
| WSR50201 | PALLET & DIVIDER WASHER | 2M21 | 2M21OT-SW03_15 |
| WSR50202 | PALLET & DIVIDER WASHER | 2M21 | 2M21OT-SW03_3 |

Grand total: 17

## ACCESS CONTROL CONNECTION SCHEDULE

| EQUIPMENT ID | EQUIPMENT DESCRIPTION | FED FROM |
|---|---|---|
| CR-AC-1405A | CARD READER | ACP-3001_8 |
| CR-AC-1409B | CARD READER | ACP-3001_9 |

Grand total: 2

NOTES

1. ALL NETWORK DROPS SHALL BE TAGGED ON BOTH ENDS OF CABLE WITH "FROM / TO" FORMAT WITH BRADY B-427 ROTATING VINYL WIRE LABELS. (EX. 2001IT-SW01_24 / TD-1001)




A1 ENLARGED PROCESS TELECOM 1ST FLOOR PLAN, AREA 4 SECTOR 3

SCALE: 3/16" = 1'-0"

0' 4' 8' 12' 16'

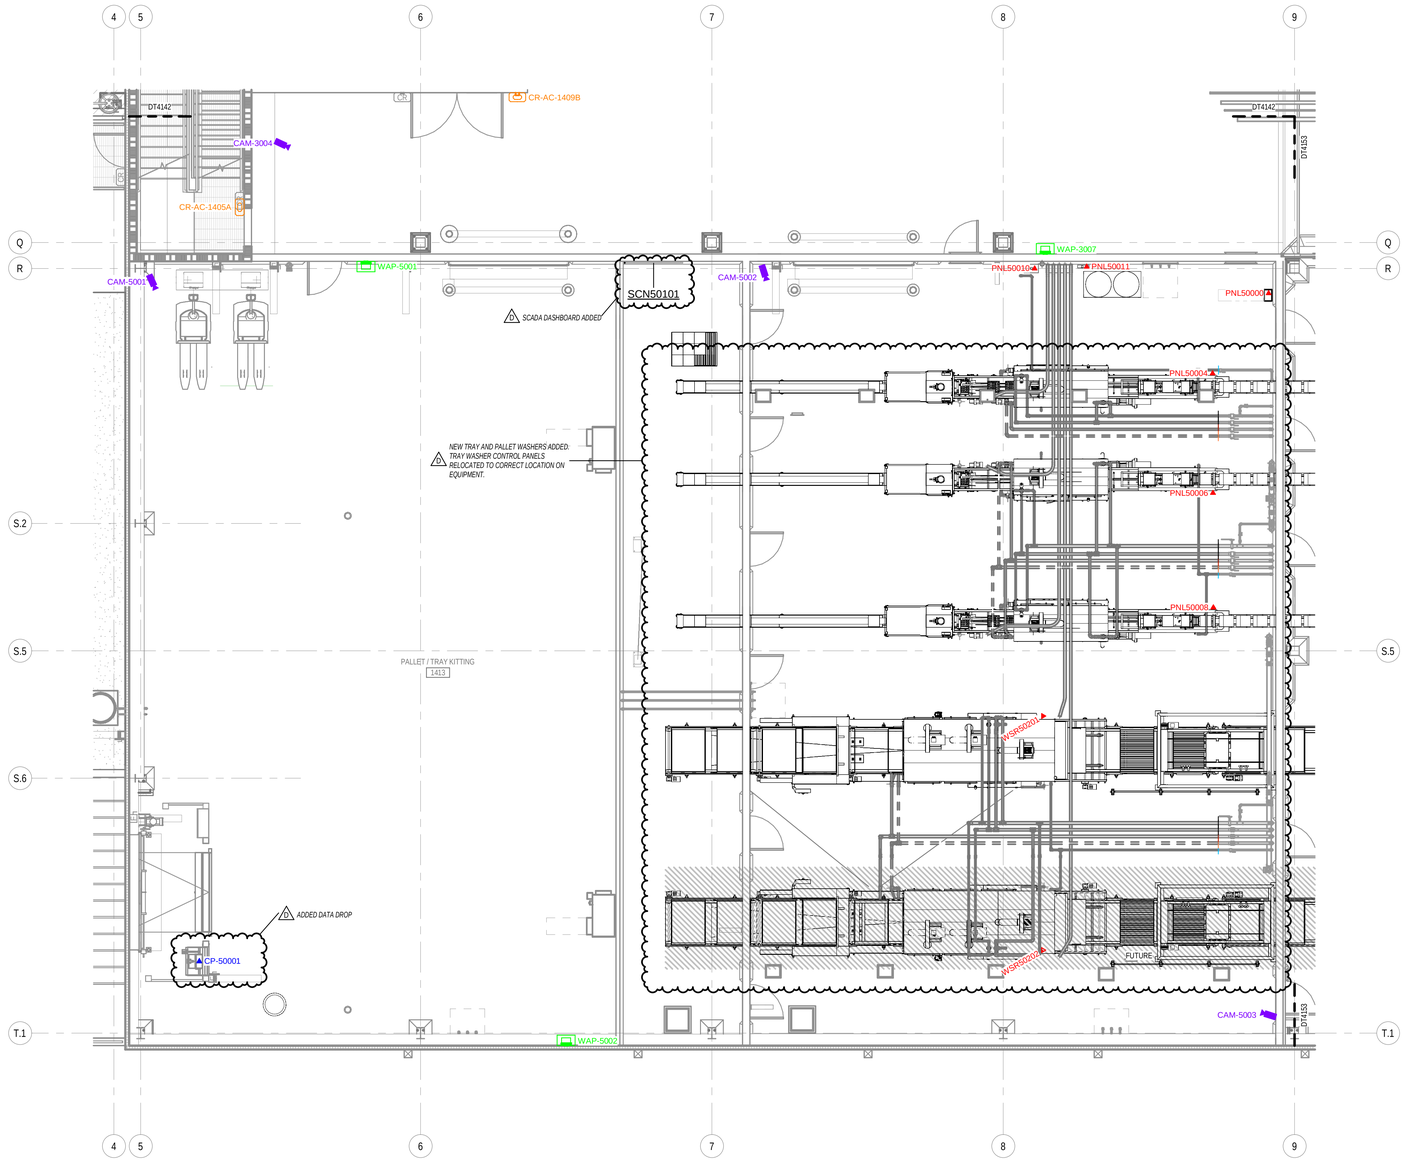


KEY PLAN

SECTORS

OWNER

PROJECT INFORMATION

**VITAL FARMS**
**EGG CENTRAL 2**
SEYMOUR,IN

stellar
TAKING SOLUTIONS FURTHER


OPERATING AS:
THE STELLAR GROUP
2900 HARTLEY ROAD, JACKSONVILLE, FL, 32257 (904) 260-2900
WWW.STELLAR.NET


SEAL

Professional certification. I hereby certify that these documents were prepared or approved by me, and that I am a duly licensed professional architect/engineer under the laws of the state of IN.

CONSULTANT


The Stellar Group, Inc.
All rights reserved. No part of this work may be used, reproduced, distributed, displayed, or otherwise communicated in any form or by any means without the prior written consent of The Stellar Group, Inc.


REVISIONS

| NO. | DESCRIPTION | DATE |
|---|---|---|
| A | DESIGN DEVELOPMENT 2 | 12/12/2025 |
| B | ISSUED FOR BID | 01/16/2026 |
| C | REVISED FOR BID | 02/06/2026 |
| D | GMP ISSUE | 04/02/2026 |

| | |
|---|---|
| DATE ISSUED: | 12/12/2025 |
| DESIGNED BY: | EJT |
| REVIEWED BY: | MAM |
| A/EOR: | |
| PROJECT NUMBER: | 07645 |

SHEET TITLE

PROCESS TELECOM 1ST FLOOR PLAN, AREA 4 SECTOR 3

SHEET ID

DT4143

PRINT IN COLOR


4/3/2026 1:11:46 AM Autodesk Docs://07645_Vital Farms Egg Central Station 2/07645_VF EGG STA 2_D_R23.rvt