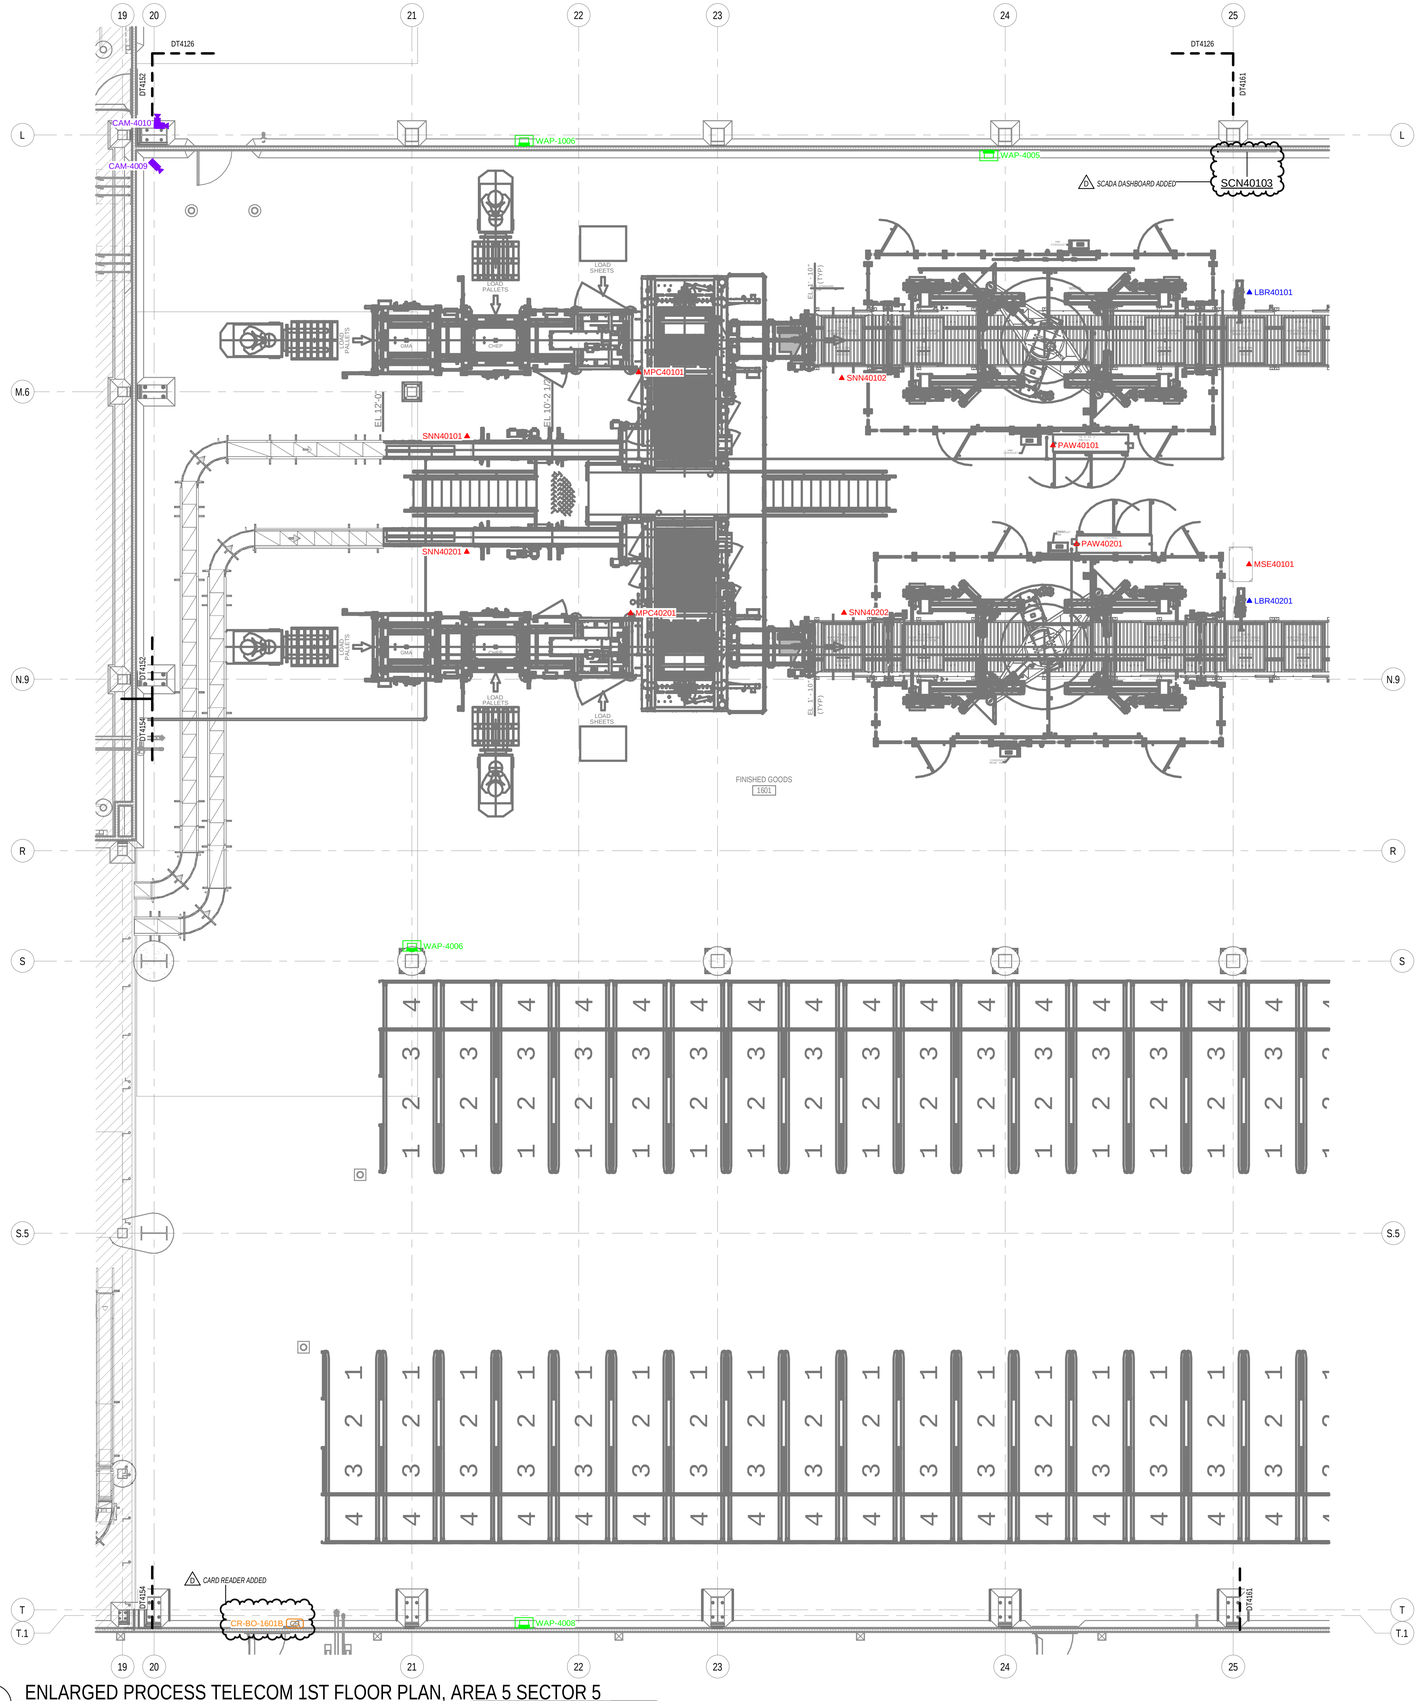

A1 ENLARGED PROCESS TELECOM 1ST FLOOR PLAN, AREA 5 SECTOR 5

SCALE: 3/16" = 1'-0"

0' 4' 8' 12' 16'

TELECOMM / DATA CONNECTION SCHEDULE

EQUIPMENT ID	EQUIPMENT DESCRIPTION	IDF	SWITCH / PORT
CAM-4009	CAMERA	2I05	2I05CS-SW01_3
CAM-4010	DUAL CAMERA	2I05	2I05CS-SW01_4
LBR40101	PRINT APPLY LABELER	2I05	2I05IT-SW01_12
LBR40201	PRINT APPLY LABELER	2I05	2I05IT-SW01_13
MPC40101	MECHANICAL PALLETIZER	2I05	2I05OT-SW01_8
MPC40201	MECHANICAL PALLETIZER	2I05	2I05OT-SW01_9
MSE40101	OVOTRACK PC STATION WITH PRINTER	2I05	2I05OT-SW01_2
PAW40101	PALLET WRAPPER	2I05	2I05OT-SW01_10
PAW40201	PALLET WRAPPER	2I05	2I05OT-SW01_11
SCN40103	SCADA DASHBOARD	2I05	2I05OT-SW01_17
SNN40101	OVOTRACK FIXED CASE SCANNER	2I05	2I05OT-SW01_4
SNN40102	OVOTRACK FIXED PALLET SCANNER	2I05	2I05OT-SW01_5
SNN40201	OVOTRACK FIXED CASE SCANNER	2I05	2I05OT-SW01_6
SNN40202	OVOTRACK FIXED PALLET SCANNER	2I05	2I05OT-SW01_7
WAP-1006	WIRELESS ACCESS POINT	2I05	2I05IT-SW01_2
WAP-4005	WIRELESS ACCESS POINT	2I05	2I05IT-SW01_5
WAP-4006	WIRELESS ACCESS POINT	2I05	2I05IT-SW01_6
WAP-4008	WIRELESS ACCESS POINT	2I05	2I05IT-SW01_8

Grand total: 18

ACCESS CONTROL CONNECTION SCHEDULE

EQUIPMENT ID	EQUIPMENT DESCRIPTION	FED FROM
CR-BO-1601B	EMPLOYEE BADGE OUT	ACP-1001_9

Grand total: 1

NOTES

1. ALL NETWORK DROPS SHALL BE TAGGED ON BOTH ENDS OF CABLE WITH "FROM / TO" FORMAT WITH BRADY B-427 ROTATING VINYL WIRE LABELS. (EX. 2I01IT-SW01_24 / TD-1001)



OWNER

PROJECT INFORMATION

VITAL FARMS
EGG CENTRAL 2
SEYMOUR,IN

OPERATING AS:
THE STELLAR GROUP
2900 HARTLEY ROAD, JACKSONVILLE, FL 32257 (904) 260-2900
WWW.STELLAR.NET

SEAL

Professional certification. I hereby certify that these documents were prepared or approved by me, and that I am a duly licensed professional architect/engineer under the laws of the state of IN.

CONSULTANT

The Stellar Group, Inc.
All rights reserved. No part of this work may be used, reproduced, distributed, displayed, or otherwise communicated in any form or by any means without the prior written consent of The Stellar Group, Inc.

REVISIONS

NO.	DESCRIPTION	DATE
A	DESIGN DEVELOPMENT 2	12/12/2025
B	ISSUED FOR BID	01/16/2026
C	REVISED FOR BID	02/06/2026
D	GMP ISSUE	04/02/2026

DATE ISSUED:	12/12/2025
DESIGNED BY:	EJT
REVIEWED BY:	MAM
A/E/OR:	
PROJECT NUMBER:	07645

SHEET TITLE

PROCESS TELECOM 1ST FLOOR PLAN, AREA 5 SECTOR 5

SHEET ID

DT4155

PRINT IN COLOR

4/3/2026 1:14:37 AM Autodesk Docs://07645_Vital Farms Egg Central Station 2/07645_VF EGG STA 2_D_R23.rvt