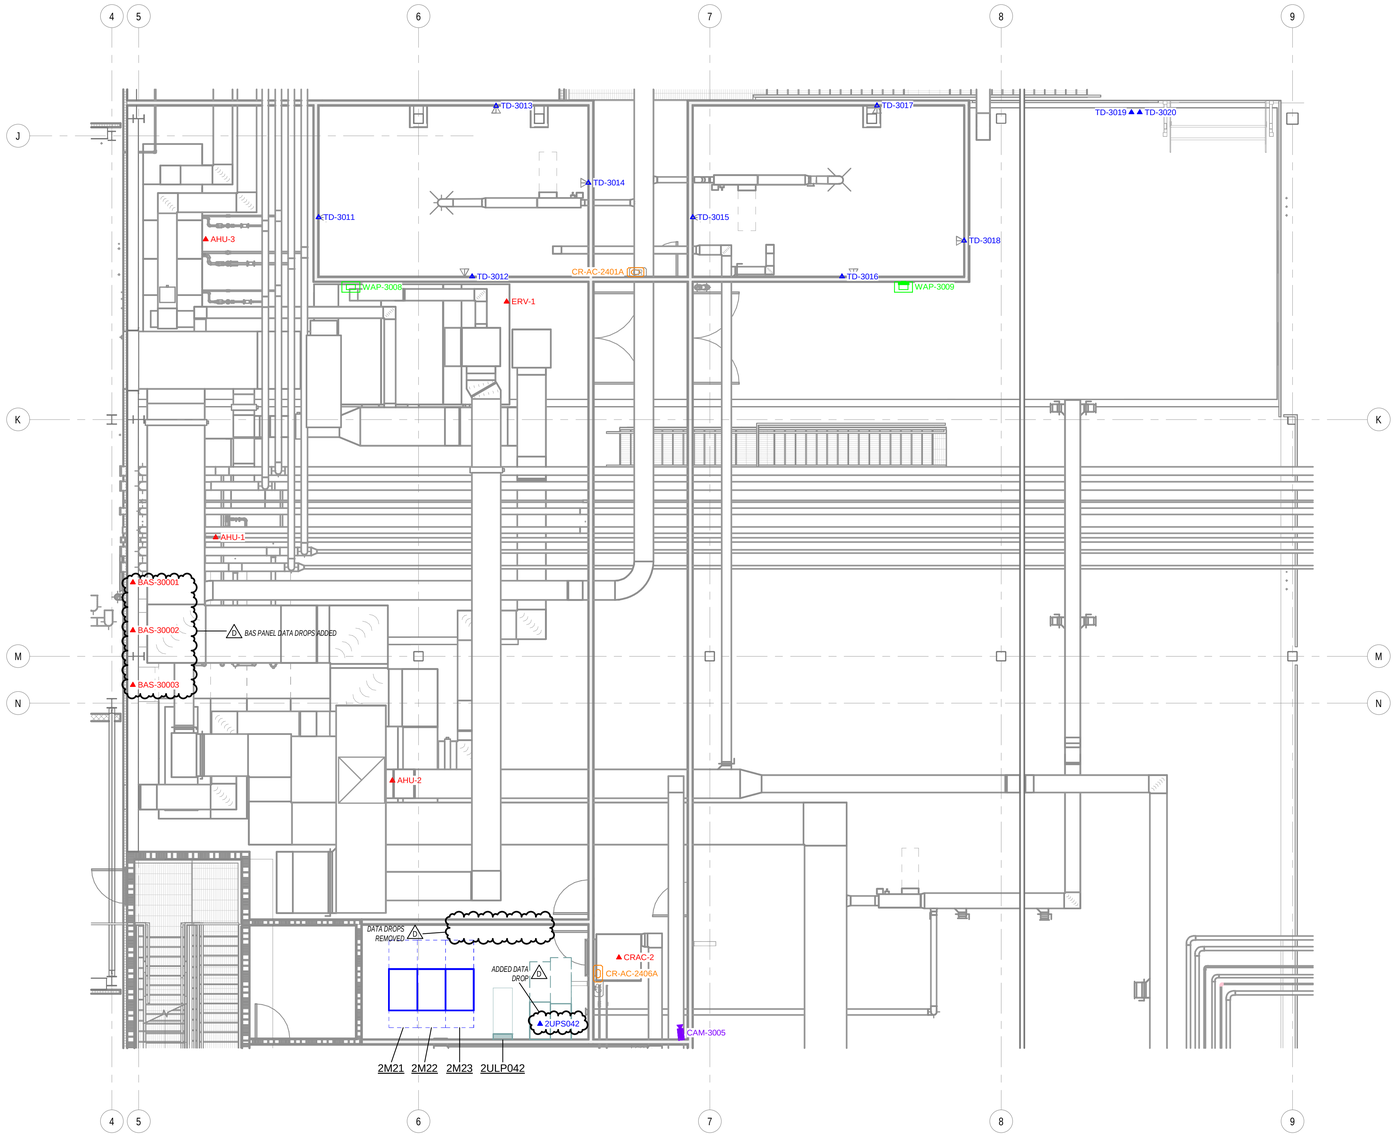


A1 ENLARGED PROCESS 2ND FLOOR PLAN AREA 4, SECTOR 2

SCALE: 3/16" = 1'-0"

0' 4' 8' 12' 16'

## TELECOMM / DATA CONNECTION SCHEDULE

| EQUIPMENT ID | EQUIPMENT DESCRIPTION | IDF | SWITCH / PORT |
|---|---|---|---|
| 2UPS042 | UPS - MDF2 | 2M21 | 2M21IT-SW01_36 |
| AHU-1 | AIR HANDLING UNIT #1 | 2M21 | 2M21OT-SW02_1 |
| AHU-2 | AIR HANDLING UNIT #2 | 2M21 | 2M21OT-SW02_2 |
| AHU-3 | AIR HANDLING UNIT #3 | 2M21 | 2M21OT-SW02_3 |
| BAS-30001 | BAS PANEL | 2M21 | 2M21OT-SW01_26 |
| BAS-30002 | BAS PANEL | 2M21 | 2M21OT-SW01_27 |
| BAS-30003 | BAS PANEL | 2M21 | 2M21OT-SW01_28 |
| CAM-3005 | CAMERA | 2M21 | 2M21CS-SW01_8 |
| CRAC-2 | SPLIT SYSTEM AIR HANDLING UNIT - MDF RM | 2M21 | 2M21OT-SW02_6 |
| ERV-1 | ENERGY RECOVERY UNIT #1 | 2M21 | 2M21OT-SW02_7 |
| TD-3011 | RJ45 DATA JACK | 2M21 | 2M21IT-SW01_26 |
| TD-3012 | RJ45 DATA JACK | 2M21 | 2M21IT-SW01_27 |
| TD-3013 | RJ45 DATA JACK | 2M21 | 2M21IT-SW01_28 |
| TD-3014 | RJ45 DATA JACK | 2M21 | 2M21IT-SW01_29 |
| TD-3015 | RJ45 DATA JACK | 2M21 | 2M21IT-SW01_30 |
| TD-3016 | RJ45 DATA JACK | 2M21 | 2M21IT-SW01_31 |
| TD-3017 | RJ45 DATA JACK | 2M21 | 2M21IT-SW01_32 |
| TD-3018 | RJ45 DATA JACK | 2M21 | 2M21IT-SW01_33 |
| TD-3019 | PARTS STORAGE LAPTOP | 2M21 | 2M21IT-SW01_34 |
| TD-3020 | PARTS STORAGE PRINTER | 2M21 | 2M21IT-SW01_35 |
| WAP-3008 | WIRELESS ACCESS POINT | 2M21 | 2M21IT-SW01_3 |
| WAP-3009 | WIRELESS ACCESS POINT | 2M21 | 2M21IT-SW01_4 |

Grand total: 22

## ACCESS CONTROL CONNECTION SCHEDULE

| EQUIPMENT ID | EQUIPMENT DESCRIPTION | FED FROM |
|---|---|---|
| CR-AC-2401A | CARD READER | ACP-3001_17 |
| CR-AC-2406A | CARD READER - IT ROOM | ACP-3001_7 |

Grand total: 2

NOTES

1. ALL NETWORK DROPS SHALL BE TAGGED ON BOTH ENDS OF CABLE WITH "FROM / TO" FORMAT WITH BRADY B-427 ROTATING VINYL WIRE LABELS. (EX. 2001IT-SW01_24 / TD-1001)




OWNER

PROJECT INFORMATION

VITAL FARMS
EGG CENTRAL 2
SEYMOUR,IN

stellar
TAKING SOLUTIONS FURTHER

OPERATING AS:
THE STELLAR GROUP
2900 HARTLEY ROAD, JACKSONVILLE, FL, 32257 (904) 260-2900
WWW.STELLAR.NET

SEAL

Professional certification. I hereby certify that these documents were prepared or approved by me, and that I am a duly licensed professional architect/engineer under the laws of the state of IN.

CONSULTANT

The Stellar Group, Inc.
All rights reserved. No part of this work may be used, reproduced, distributed, displayed, or otherwise communicated in any form or by any means without the prior written consent of The Stellar Group, Inc.

REVISIONS

| NO. | DESCRIPTION | DATE |
|---|---|---|
| A | DESIGN DEVELOPMENT 2 | 12/12/2025 |
| B | ISSUED FOR BID | 01/16/2026 |
| C | REVISED FOR BID | 02/06/2026 |
| D | GMP ISSUE | 04/02/2026 |

| | |
|---|---|
| DATE ISSUED: | 12/12/2025 |
| DESIGNED BY: | EJT |
| REVIEWED BY: | MAM |
| A/EOR: | |
| PROJECT NUMBER: | 07645 |

SHEET TITLE

PROCESS TELECOM 2ND FLOOR PLAN, AREA 4 SECTOR 2

SHEET ID

DT4242

PRINT IN COLOR

4/3/2026 1:16:11 AM Autodesk Docs://07645_Vital Farms Egg Central Station 2/07645_VF EGG STA 2_D_R23.rvt