TELECOMM / DATA CONNECTION SCHEDULE

EQUIPMENT ID	EQUIPMENT DESCRIPTION	IDF	SWITCH / PORT
SCN40101	SCADA DASHBOARD	2I03	2I03IT-SW01_19
SCN40102	SCADA DASHBOARD	2I03	2I03IT-SW01_18
CAM-2014	CAMERA	2M21	2M21CS-SW01_5
CAM-4006	CAMERA	2M21	2M21CS-SW01_11
CAM-4007	CAMERA	2M21	2M21CS-SW01_12
CSR40101	CASE SEALER	2M21	2M21OT-SW03_11
CSR40102	CASE SEALER	2M21	2M21OT-SW03_12
CSR40201	CASE SEALER	2M21	2M21OT-SW03_13
CSR40202	CASE SEALER	2M21	2M21OT-SW03_14
PNL20107	OVERHEAD CASE CONVEYORS PANEL	2M21	2M21OT-SW03_1
PNL20207	OVERHEAD CASE CONVEYORS PANEL	2M21	2M21OT-SW03_2
WAP-4014	WIRELESS ACCESS POINT	2M21	2M21IT-SW01_6

Grand total: 12

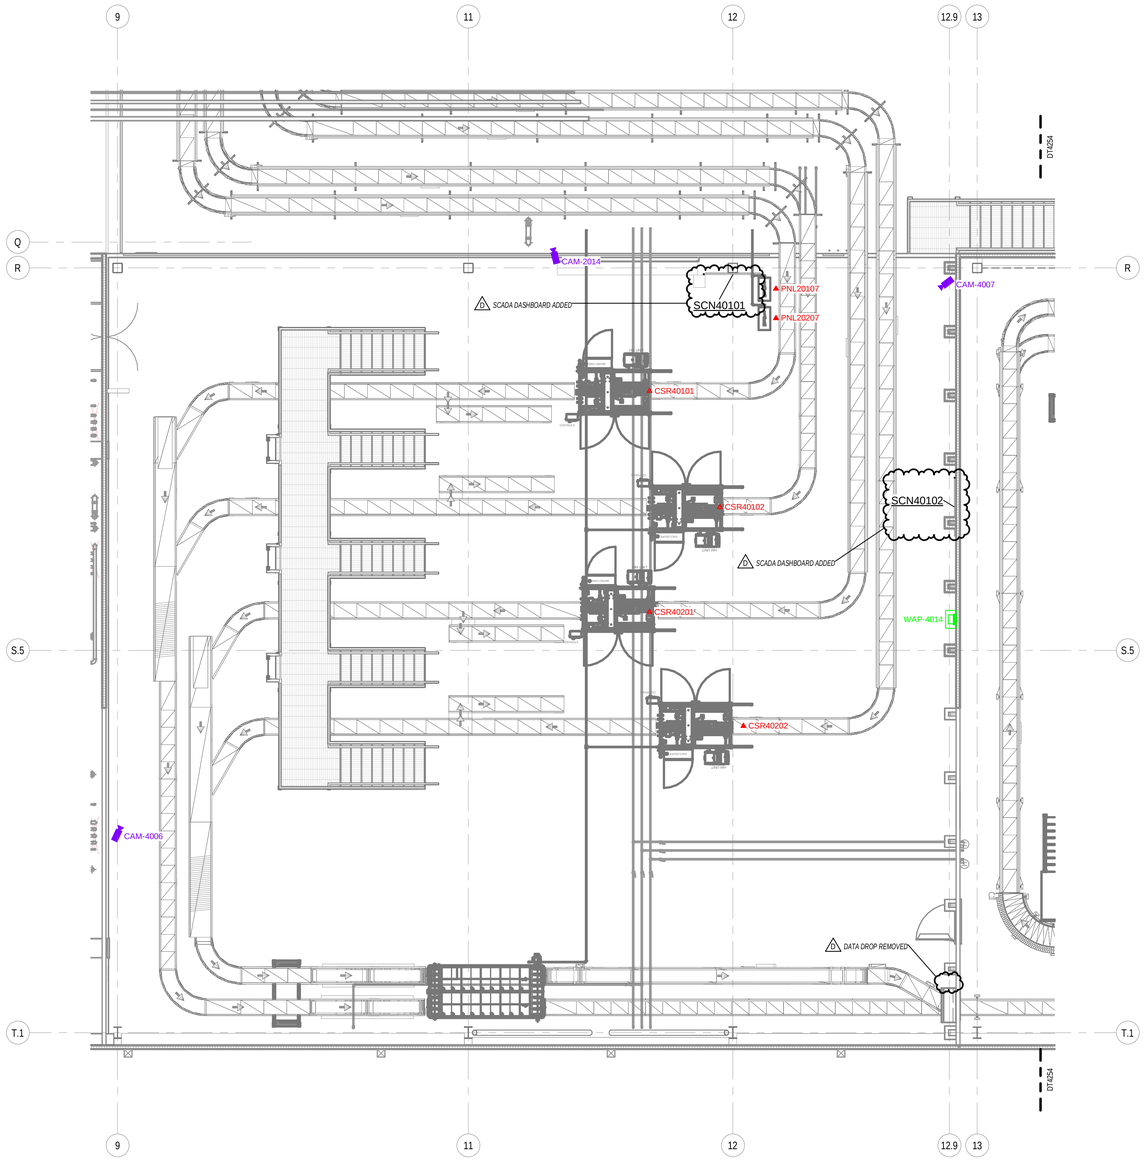

NOTES

1. ALL NETWORK DROPS SHALL BE TAGGED ON BOTH ENDS OF CABLE WITH "FROM / TO" FORMAT WITH BRADY B-427 ROTATING VINYL WIRE LABELS. (EX. 2I01IT-SW01_24 / TD-1001)

A1 ENLARGED PROCESS TELECOM 2ND FLOOR PLAN, AREA 5 SECTOR 3

SCALE: 3/16" = 1'-0"

0' 4' 8' 12' 16'



KEY PLAN

SECTORS

N

OWNER

PROJECT INFORMATION

VITAL FARMS
EGG CENTRAL 2
SEYMOUR,IN

stellar
TAKING SOLUTIONS FURTHER

OPERATING AS:
THE STELLAR GROUP
2900 HARTLEY ROAD, JACKSONVILLE, FL 32257 (904) 260-2900
WWW.STELLAR.NET

SEAL

Professional certification. I hereby certify that these documents were prepared or approved by me, and that I am a duly licensed professional architect/engineer under the laws of the state of IN.

CONSULTANT

The Stellar Group, Inc.
All rights reserved. No part of this work may be used, reproduced, distributed, displayed, or otherwise communicated in any form or by any means without the prior written consent of The Stellar Group, Inc.

REVISIONS

NO.	DESCRIPTION	DATE
A	DESIGN DEVELOPMENT 2	12/12/2025
B	ISSUED FOR BID	01/16/2026
C	REVISED FOR BID	02/06/2026
D	GMP ISSUE	04/02/2026

DATE ISSUED:	12/12/2025
DESIGNED BY:	EJT
REVIEWED BY:	MAM
A/EOR:	
PROJECT NUMBER:	07645

SHEET TITLE

PROCESS TELECOM 2ND FLOOR PLAN, AREA 5 SECTOR 3

SHEET ID

DT4253

PRINT IN COLOR

4/3/2026 1:16:58 AM Autodesk Docs://07645_Vital Farms Egg Central Station 2/07645_VF EGG STA 2_D_R23.rvt