NOTES

1. ALL NETWORK DROPS SHALL BE TAGGED ON BOTH ENDS OF CABLE WITH "FROM / TO" FORMAT WITH BRADY B-427 ROTATING VINYL WIRE LABELS.
(EX. 201IT-SW01_24 / TD-1001)

TELECOMM / DATA CONNECTION SCHEDULE

EQUIPMENT ID	EQUIPMENT DESCRIPTION	IDF	SWITCH / PORT
CAM-4012	CAMERA	2I03	2I03CS-SW01_11
PNL40001	ACCUMULATION CONVEYOR SYSTEM PANEL	2I03	2I03OT-SW01_10
PNL40001	ACCUMULATION CONVEYOR SYSTEM PANEL HMI	2I03	2I03OT-SW01_11
WAP-4015	WIRELESS ACCESS POINT	2I03	2I03IT-SW01_11
WAP-4016	WIRELESS ACCESS POINT	2I03	2I03IT-SW01_12
WAP-4017	WIRELESS ACCESS POINT	2I03	2I03IT-SW01_13
WAP-4018	WIRELESS ACCESS POINT	2I03	2I03IT-SW01_14

Grand total: 7

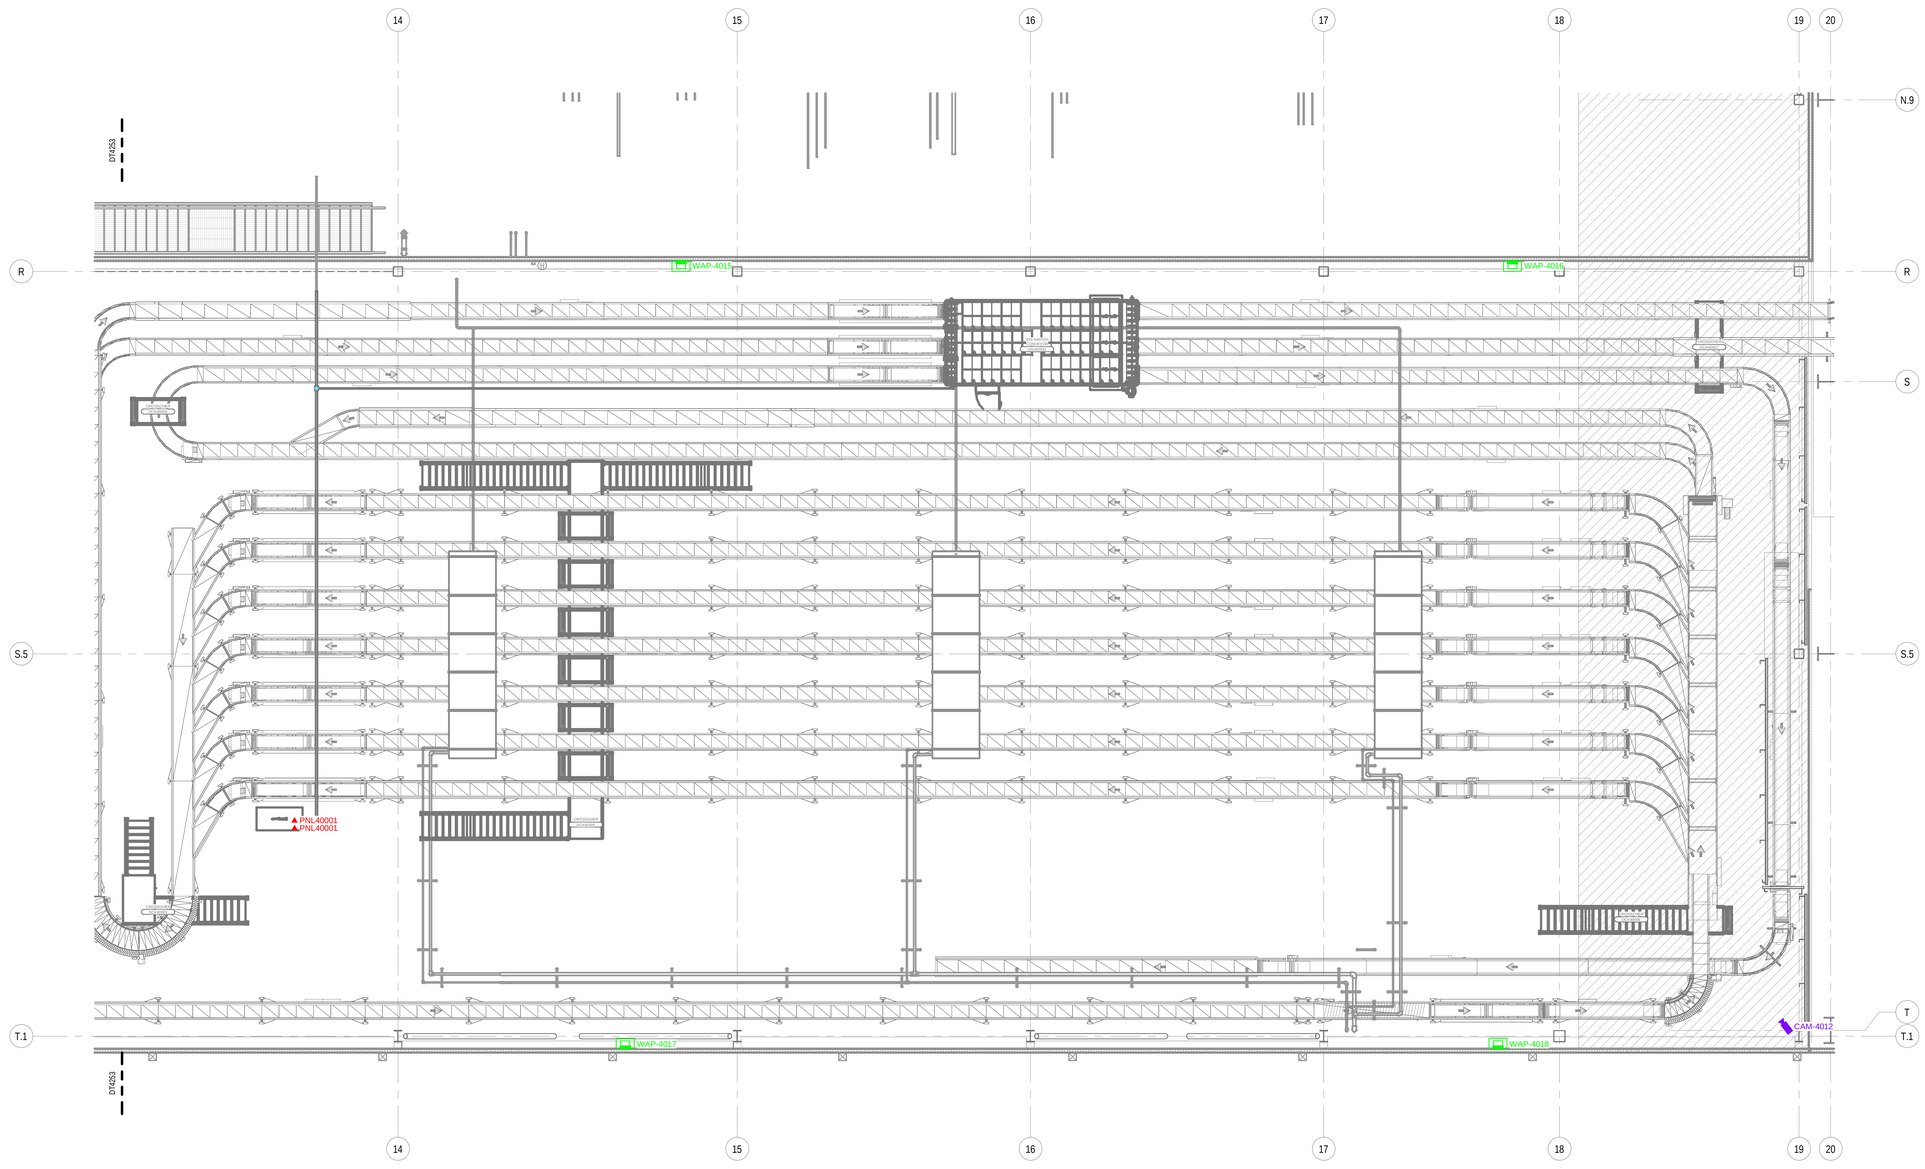

A1 ENLARGED PROCESS TELECOM 2ND FLOOR PLAN, AREA 5 SECTOR 4

SCALE: 3/16" = 1'-0"

0' 4' 8' 12' 16'



KEY PLAN

SECTORS

N

OWNER

PROJECT INFORMATION

VITAL FARMS
EGG CENTRAL 2
SEYMOUR,IN

OPERATING AS:
THE STELLAR GROUP
2900 HARTLEY ROAD, JACKSONVILLE, FL, 32257 (904) 260-2900
WWW.STELLAR.NET

SEAL

Professional certification. I hereby certify that these documents were prepared or approved by me, and that I am a duly licensed professional architect/engineer under the laws of the state of IN.

CONSULTANT

The Stellar Group, Inc.
All rights reserved. No part of this work may be used, reproduced, distributed, displayed, or otherwise communicated in any form or by any means without the prior written consent of The Stellar Group, Inc.

REVISIONS

NO.	DESCRIPTION	DATE
A	DESIGN DEVELOPMENT 2	12/12/2025
B	ISSUED FOR BID	01/16/2026
C	REVISED FOR BID	02/06/2026
D	GMP ISSUE	04/02/2026

DATE ISSUED: 12/12/2025
DESIGNED BY: EJT
REVIEWED BY: MAM
A/E/OR:
PROJECT NUMBER: 07645

SHEET TITLE

PROCESS TELECOM 2ND FLOOR PLAN, AREA 5 SECTOR 4

SHEET ID

DT4254

PRINT IN COLOR

4/3/2026 1:17:23 AM Autodesk Docs://07645_Vital Farms Egg Central Station 2/07645_VF EGG STA 2_D_R23.rvt