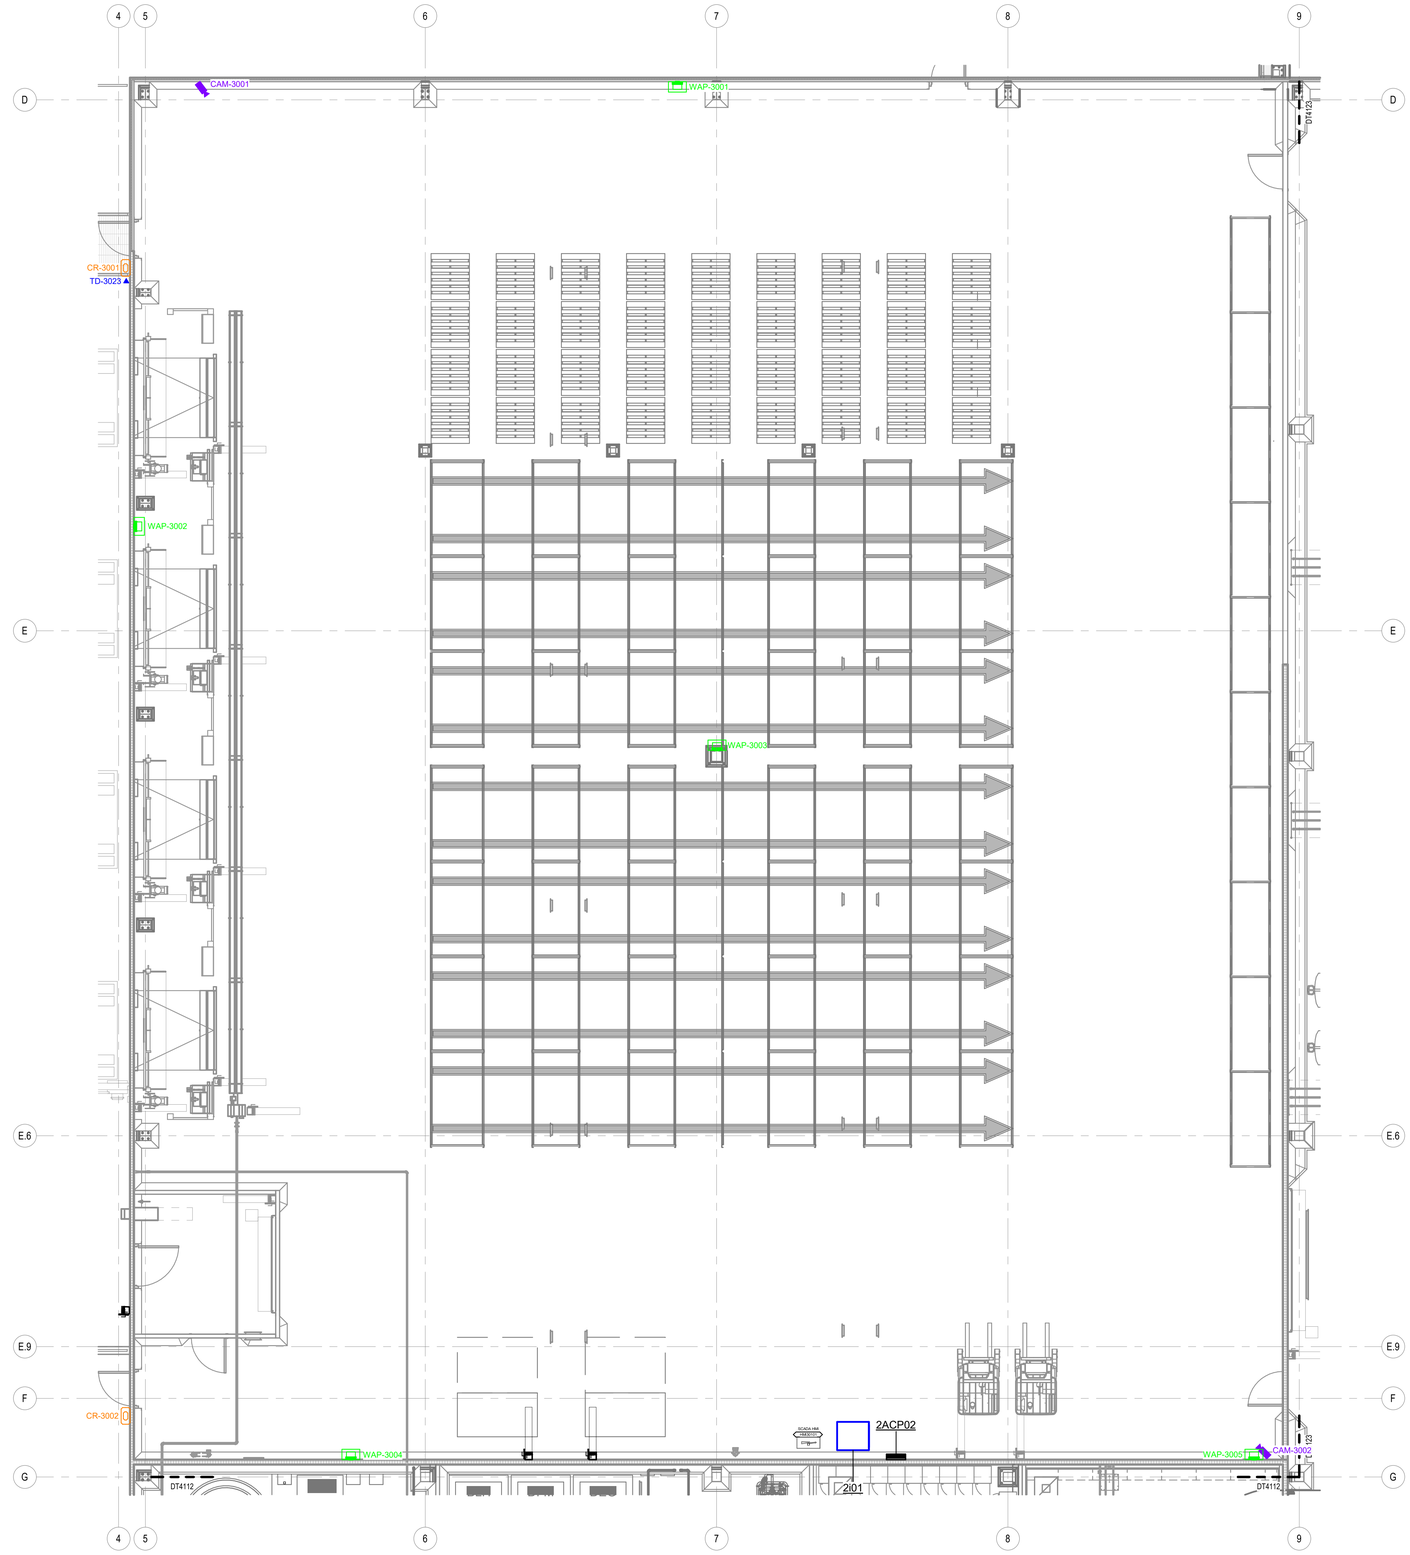

A1 ENLARGED PROCESS TELECOMM 1ST FLOOR PLAN, AREA 1 SECTOR 1

SCALE: 3/16" = 1'-0"

0' 4' 8' 12' 16'

TELECOMM / DATA CONNECTION SCHEDULE

EQUIPMENT ID	EQUIPMENT DESCRIPTION	IDF	SWITCH / PORT
CAM-3001	CAMERA	201	201IT-SW01_1
CAM-3002	CAMERA	201	201IT-SW01_2
TD-3023	DRY GOODS DOCK ENTRANCE INTERCOM	201	201IT-SW01_8
WAP-3001	WIRELESS ACCESS POINT	201	201IT-SW01_3
WAP-3002	WIRELESS ACCESS POINT	201	201IT-SW01_4
WAP-3003	WIRELESS ACCESS POINT	201	201IT-SW01_5
WAP-3004	WIRELESS ACCESS POINT	201	201IT-SW01_6
WAP-3005	WIRELESS ACCESS POINT	201	201IT-SW01_7

Grand total: 8

ACCESS CONTROL CONNECTION SCHEDULE

EQUIPMENT ID	EQUIPMENT DESCRIPTION	FED FROM
CR-3001	CARD READER	2ACP02_1
CR-3002	CARD READER	2ACP02_2

Grand total: 2

NOTES

1. ALL NETWORK DROPS SHALL BE TAGGED ON BOTH ENDS OF CABLE WITH "FROM / TO" FORMAT WITH BRADY B-427 ROTATING VINYL WIRE LABELS. (EX. 201IT-SW01_24 / TD-1001)



KEY PLAN

SECTORS

N

OWNER

PROJECT INFORMATION

VITAL FARMS
EGG CENTRAL 2
SEYMOUR,IN

stellar
TAKING SOLUTIONS FURTHER

OPERATING AS:
THE STELLAR GROUP
2900 HARTLEY ROAD, JACKSONVILLE, FL 32257 (904) 260-2900
WWW.STELLAR.NET

SEAL

Professional certification. I hereby certify that these documents were prepared or approved by me, and that I am a duly licensed professional architect/engineer under the laws of the state of IN

CONSULTANT

The Stellar Group, Inc.
All rights reserved. No part of this work may be used, reproduced, distributed, displayed, or otherwise communicated in any form or by any means without the prior written consent of The Stellar Group, Inc.

REVISIONS

NO.	DESCRIPTION	DATE
A	ISSUED FOR BID	01/16/2026
B	REVISED FOR BID	02/06/2026

DATE ISSUED:	XX/XX/XXXX
DESIGNED BY:	KDK
REVIEWED BY:	MAM
A/E/OR:	
PROJECT NUMBER:	07645

SHEET TITLE

PROCESS TELECOM 1ST FLOOR PLAN, AREA 1 SECTOR 1

SHEET ID

DT4111

PRINT IN COLOR

2/6/2026 3:13:32 PM Autodesk Docs://07645_Vital Farms Egg Central Station 2/07645_VF EGG STA 2_D_R23.rvt