TELECOMM / DATA CONNECTION SCHEDULE

EQUIPMENT ID	EQUIPMENT DESCRIPTION	IDF	SWITCH / PORT
CAM-3002	CAMERA	2I01	2I01IT-SW01_2
CAM-3006	CAMERA	2M21	2M21CS-SW01_9
CAM-3007	CAMERA	2M21	2M21CS-SW01_10
COP30001	COP TANK	2M21	2M21OT-SW03_11
COP30002	COP TANK	2M21	2M21OT-SW03_12
FPB-2-6	AIR TERMINAL UNIT	2M21	2M21OT-SW02_13
PNL30001	CHEMICAL SKID CONTROL PANEL	2M21	2M21OT-SW03_3
PNL30002	WALCHEM I-9 CONTROLLER	2M21	2M21OT-SW03_4
TD-3001	RJ45 DATA JACK	2M21	2M21IT-SW01_18
TD-3002	RJ45 DATA JACK	2M21	2M21IT-SW01_19
TD-3003	RJ45 DATA JACK	2M21	2M21IT-SW01_20

Grand total: 11

ACCESS CONTROL CONNECTION SCHEDULE

EQUIPMENT ID	EQUIPMENT DESCRIPTION	FED FROM
CR-3003	CARD READER	2ACP02_3
CR-3004	CARD READER	2ACP02_4

Grand total: 2

NOTES:

1. ALL NETWORK DROPS SHALL BE TAGGED ON BOTH ENDS OF CABLE WITH "FROM / TO" FORMAT WITH BRADY B-427 ROTATING VINYL WIRE LABELS. (EX. 2I01IT-SW01_24 / TD-1001)

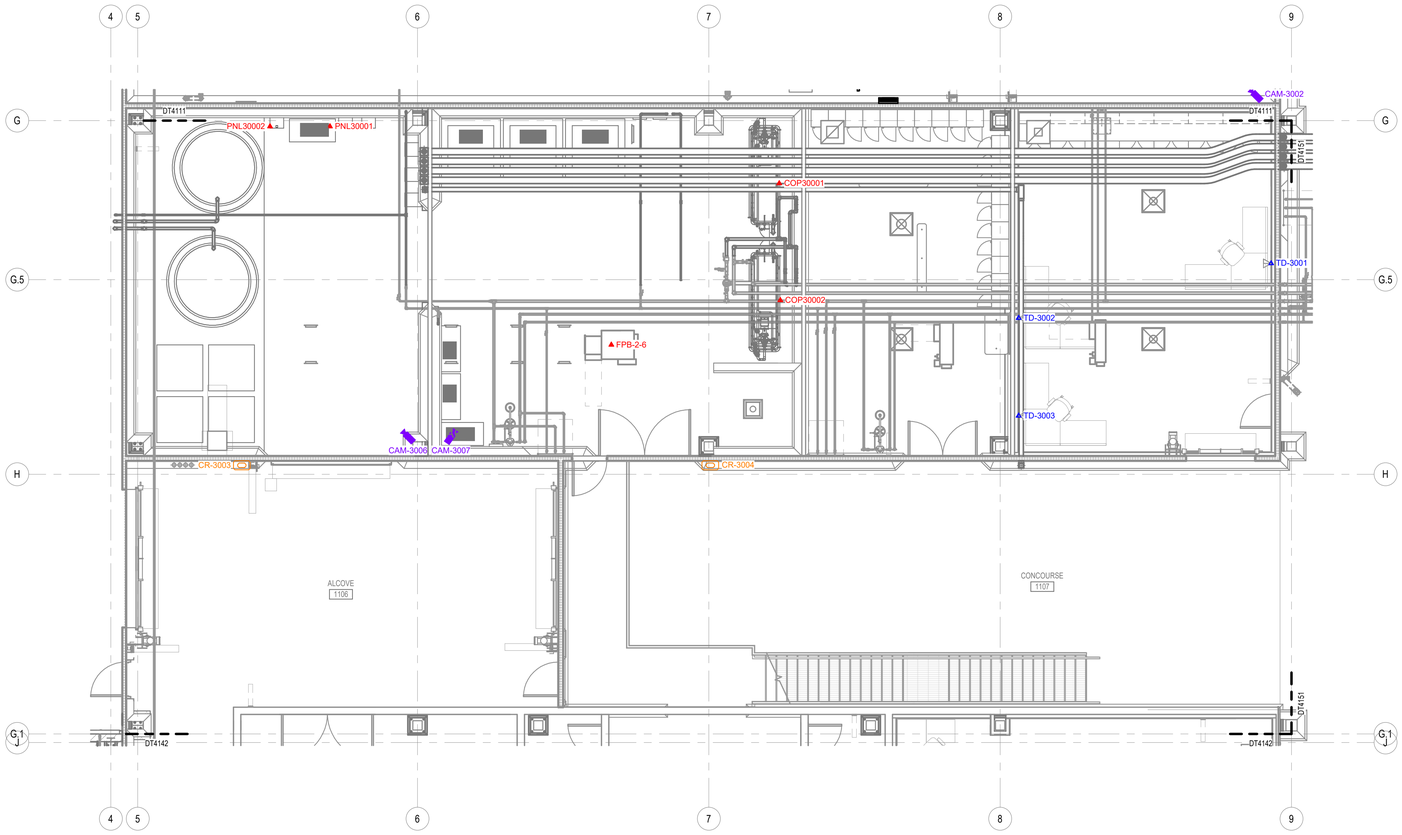

A1 ENLARGED PROCESS TELECOM 1ST FLOOR PLAN, AREA 1 SECTOR 2

SCALE: 3/16" = 1'-0"

0' 4' 8' 12' 16'



KEY PLAN

SECTORS

N

OWNER

PROJECT INFORMATION

VITAL FARMS
EGG CENTRAL 2
SEYMOUR,IN

stellar
TAKING SOLUTIONS FURTHER

OPERATING AS:
THE STELLAR GROUP
2900 HARTLEY ROAD, JACKSONVILLE, FL 32257 (904) 260-2900
WWW.STELLAR.NET

SEAL

Professional certification. I hereby certify that these documents were prepared or approved by me, and that I am a duly licensed professional architect/engineer under the laws of the state of IN.

CONSULTANT

The Stellar Group, Inc.
All rights reserved. No part of this work may be used, reproduced, distributed, displayed, or otherwise communicated in any form or by any means without the prior written consent of The Stellar Group, Inc.

REVISIONS

NO.	DESCRIPTION	DATE
A	DESIGN DEVELOPMENT 2	12/12/2025
B	ISSUED FOR BID	01/16/2026
C	REVISED FOR BID	02/06/2026

DATE ISSUED:	12/12/2025
DESIGNED BY:	EJT
REVIEWED BY:	MAM
A/E/OR:	
PROJECT NUMBER:	07645

SHEET TITLE

PROCESS TELECOM 1ST FLOOR PLAN, AREA 1 SECTOR 2

SHEET ID

DT4112

PRINT IN COLOR

2/6/2026 3:14:01 PM Autodesk Docs://07645_Vital Farms Egg Central Station 2/07645_VF EGG STA 2_D_R23.rvt