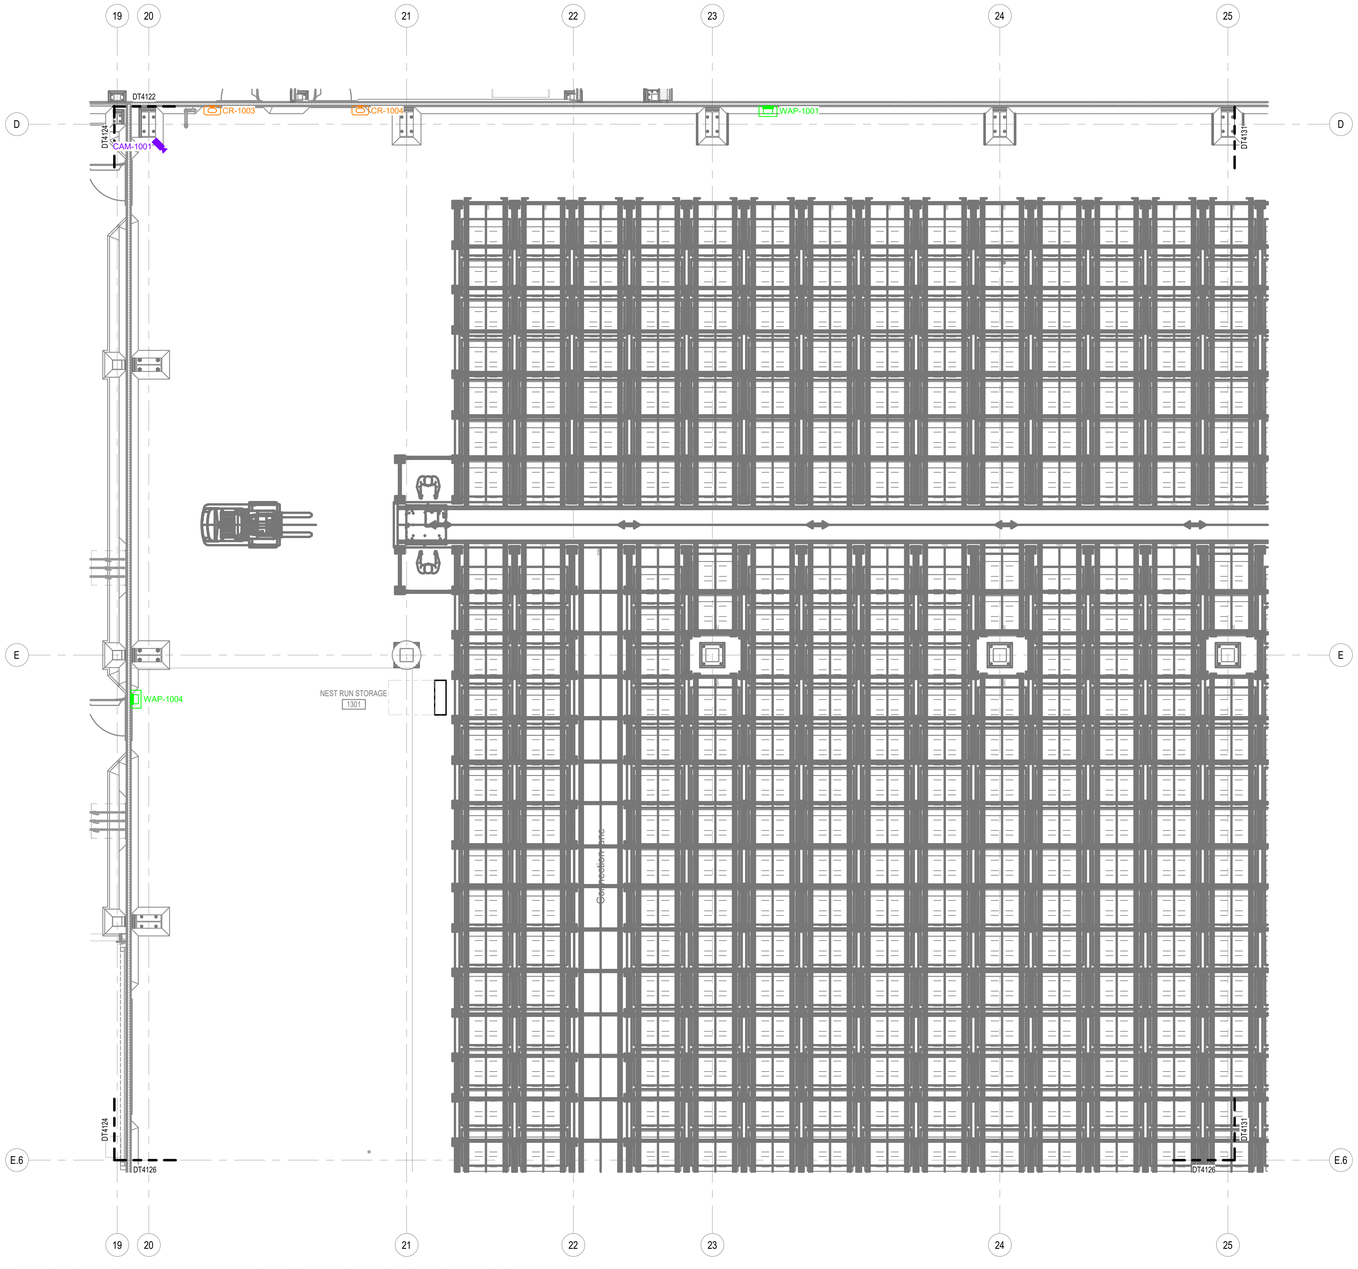

A1 ENLARGED PROCESS TELECOM 1ST FLOOR PLAN, AREA 2 SECTOR 5

SCALE: 3/16" = 1'-0"

0' 4' 8' 12' 16'

TELECOMM / DATA CONNECTION SCHEDULE

EQUIPMENT ID	EQUIPMENT DESCRIPTION	IDF	SWITCH / PORT
CAM-1001	CAMERA	2I04	2I04IT-SW01_1
WAP-1001	WIRELESS ACCESS POINT	2I04	2I04IT-SW01_2
WAP-1004	WIRELESS ACCESS POINT	2I04	2I04IT-SW01_5

Grand total: 3

ACCESS CONTROL CONNECTION SCHEDULE

EQUIPMENT ID	EQUIPMENT DESCRIPTION	FED FROM
CR-1003	CARD READER	2ACP01_11
CR-1004	CARD READER	2ACP01_12

Grand total: 2

NOTES

1. ALL NETWORK DROPS SHALL BE TAGGED ON BOTH ENDS OF CABLE WITH "FROM / TO" FORMAT WITH BRADY B-427 ROTATING VINYL WIRE LABELS. (EX. 2I01IT-SW01_24 / TD-1001)



KEY PLAN

SECTORS

OWNER

PROJECT INFORMATION

VITAL FARMS
EGG CENTRAL 2
SEYMOUR,IN

stellar
TAKING SOLUTIONS FURTHER

OPERATING AS:
THE STELLAR GROUP
2900 HARTLEY ROAD, JACKSONVILLE, FL, 32257 (904) 260-2900
WWW.STELLAR.NET

SEAL

Professional certification. I hereby certify that these documents were prepared or approved by me, and that I am a duly licensed professional architect/engineer under the laws of the state of IN.

CONSULTANT

The Stellar Group, Inc.
All rights reserved. No part of this work may be used, reproduced, distributed, displayed, or otherwise communicated in any form or by any means without the prior written consent of The Stellar Group, Inc.

REVISIONS

NO.	DESCRIPTION	DATE
A	ISSUED FOR BID	01/16/2026
B	REVISED FOR BID	02/06/2026

DATE ISSUED:	XX/XX/XXXX
DESIGNED BY:	KDK
REVIEWED BY:	MAM
A/EOR:	
PROJECT NUMBER:	07645

SHEET TITLE

PROCESS TELECOM 1ST FLOOR PLAN, AREA 2 SECTOR 5

SHEET ID

DT4125

PRINT IN COLOR

2/6/2026 3:16:08 PM Autodesk Docs://07645_Vital Farms Egg Central Station 2/07645_VF EGG STA 2_D_R23.rvt