NOTES

1. ALL NETWORK DROPS SHALL BE TAGGED ON BOTH ENDS OF CABLE WITH "FROM / TO" FORMAT WITH BRADY B-427 ROTATING VINYL WIRE LABELS.
(EX. 201IT-SW01_24 / TD-1001)

TELECOMM / DATA CONNECTION SCHEDULE

EQUIPMENT ID	EQUIPMENT DESCRIPTION	IDF	SWITCH / PORT
3HMSB	SWITCHBOARD - ELECTRICAL 1310	2I06	2I06IT-SW01_14
CAM-1005	CAMERA	2I06	2I06CS-SW01_10
CAM-1006	CAMERA	2I06	2I06CS-SW01_11
PNL10005	VERTICAL CONVEYOR PANEL	2I06	2I06OT-SW01_4
RCU-5	REFRIGERATION CONDENSING UNIT #5	2I06	2I06OT-SW01_11
TD-1001	RJ45 DATA JACK	2I06	2I06IT-SW01_9
TD-1002	RJ45 DATA JACK	2I06	2I06IT-SW01_10
TD-1003	RJ45 DATA JACK	2I06	2I06IT-SW01_11
TD-1004	RJ45 DATA JACK	2I06	2I06IT-SW01_12
TD-1005	RJ45 DATA JACK	2I06	2I06IT-SW01_13
TV-1001	TRUCK LOUNGE TV / DISPLAY	2I06	2I06IT-SW01_8
WAP-1011	WIRELESS ACCESS POINT	2I06	2I06IT-SW01_3
WAP-1012	WIRELESS ACCESS POINT	2I06	2I06IT-SW01_4
WAP-1013	WIRELESS ACCESS POINT	2I06	2I06IT-SW01_5

Grand total: 14

ACCESS CONTROL CONNECTION SCHEDULE

EQUIPMENT ID	EQUIPMENT DESCRIPTION	FED FROM
CR-1005	CARD READER	2ACP03_3
CR-2003	CARD READER	2ACP03_4

Grand total: 2

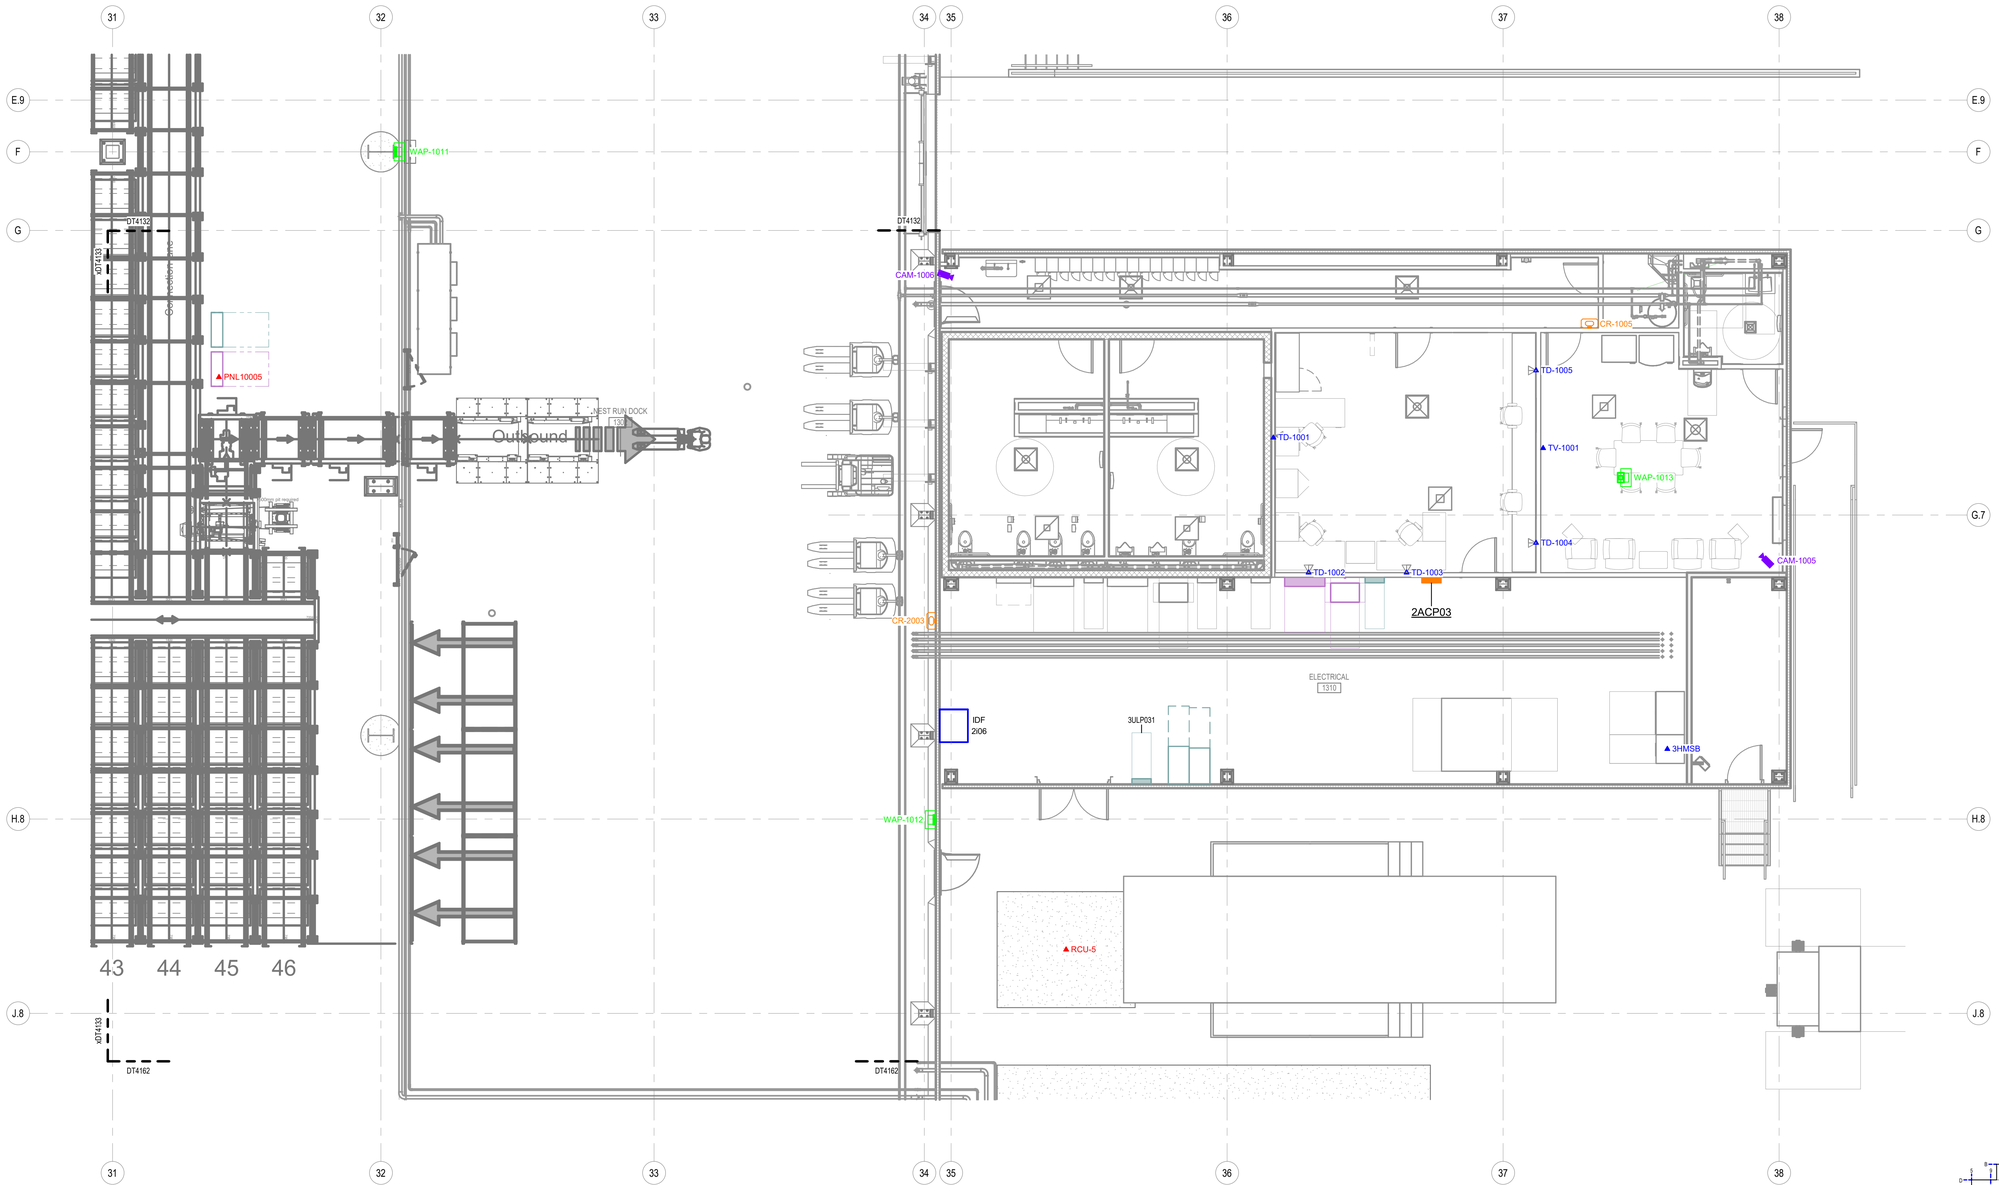

A1 ENLARGED PROCESS TELECOM 1ST FLOOR PLAN, AREA 3 SECTOR 4

SCALE: 3/16" = 1'-0"

0' 4' 8' 12' 16'



KEY PLAN

SECTORS

N

OWNER

PROJECT INFORMATION

VITAL FARMS
EGG CENTRAL 2
SEYMOUR,IN

stellar
TAKING SOLUTIONS FURTHER

OPERATING AS:
THE STELLAR GROUP
2900 HARTLEY ROAD, JACKSONVILLE, FL 32257 (904) 260-2900
WWW.STELLAR.NET

SEAL

Professional certification. I hereby certify that these documents were prepared or approved by me, and that I am a duly licensed professional architect/engineer under the laws of the state of IN.

CONSULTANT

The Stellar Group, Inc.
All rights reserved. No part of this work may be used, reproduced, distributed, displayed, or otherwise communicated in any form or by any means without the prior written consent of The Stellar Group, Inc.

REVISIONS

NO.	DESCRIPTION	DATE
A	DESIGN DEVELOPMENT 2	12/12/2025
B	ISSUED FOR BID	01/16/2026
C	REVISED FOR BID	02/06/2026

DATE ISSUED:	12/12/2025
DESIGNED BY:	EJT
REVIEWED BY:	MAM
A/EOR:	
PROJECT NUMBER:	07645

SHEET TITLE

PROCESS TELECOM 1ST FLOOR PLAN, AREA 3 SECTOR 4

SHEET ID

DT4134

PRINT IN COLOR

2/7/2026 12:59:34 AM Autodesk Docs://07645_Vital Farms Egg Central Station 2/07645_VF EGG STA 2_D_R23.rvt