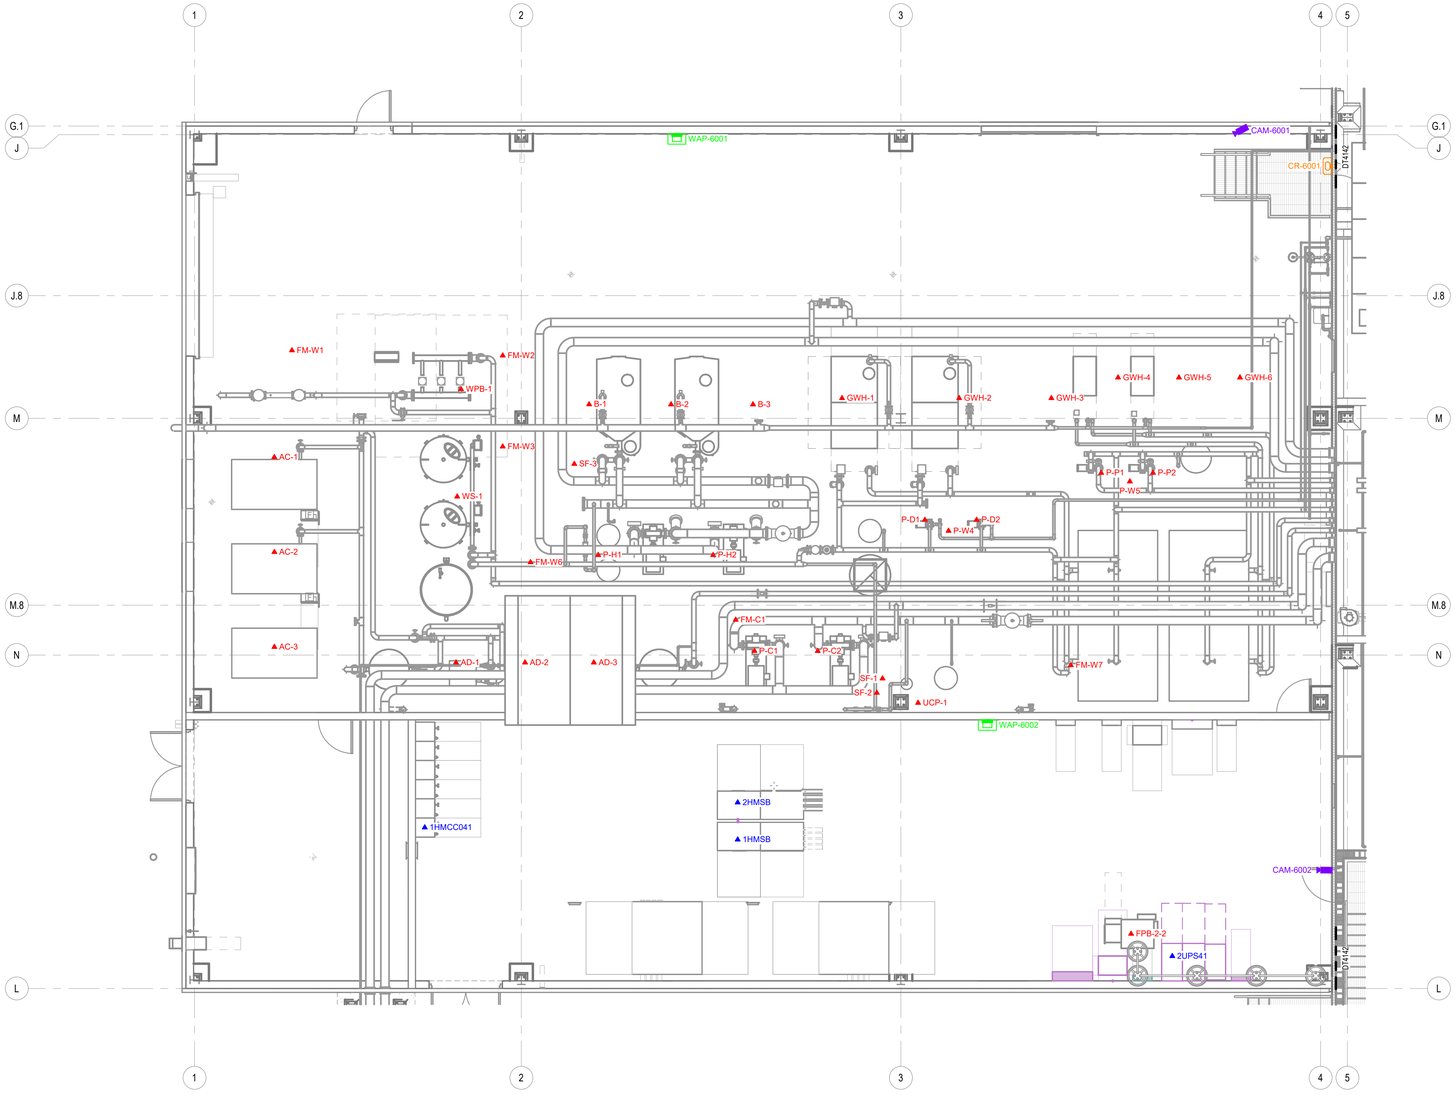

A1 ENLARGED PROCESS TELECOM 1ST FLOOR PLAN, AREA 4 SECTOR 1

SCALE: 3/16" = 1'-0"

0' 4' 8' 12' 16'

TELECOMM / DATA CONNECTION SCHEDULE

EQUIPMENT ID	EQUIPMENT DESCRIPTION	IDF	SWITCH / PORT
1HMCC041	MCC - ELECTRICAL 1402	2M21	2M21IT-SW01_38
1HMSB	SWITCHBOARD - ELECTRICAL 1402	2M21	2M21IT-SW01_39
2HMSB	SWITCHBOARD - ELECTRICAL 1402	2M21	2M21IT-SW01_40
2UPS41	UPS PANEL - ELECTRICAL 1402	2M21	2M21IT-SW01_41
AC-1	UTILITY AIR COMPRESSOR 1	2M21	2M21OT-SW01_1
AC-2	UTILITY AIR COMPRESSOR 2	2M21	2M21OT-SW01_2
AC-3	UTILITY AIR COMPRESSOR 3	2M21	2M21OT-SW01_3
AD-1	REFRIGERATED AIR DRYER #1	2M21	2M21OT-SW01_5
AD-2	REFRIGERATED AIR DRYER #2	2M21	2M21OT-SW01_6
AD-3	REFRIGERATED AIR DRYER #3	2M21	2M21OT-SW01_7
B-1	CLOSED LOOP HOT WATER BOILER #1	2M21	2M21OT-SW01_8
B-2	CLOSED LOOP HOT WATER BOILER #2	2M21	2M21OT-SW01_9
B-3	CLOSED LOOP HOT WATER BOILER #3	2M21	2M21OT-SW01_10
CAM-6001	CAMERA	2M21	2M21CS-SW01_18
CAM-6002	CAMERA	2M21	2M21CS-SW01_19
FM-C1	FLOW METER	2M21	2M21OT-SW01_12
FM-W1	FLOW METER	2M21	2M21OT-SW01_13
FM-W2	FLOW METER	2M21	2M21OT-SW01_14
FM-W3	FLOW METER	2M21	2M21OT-SW01_15
FM-W6	FLOW METER	2M21	2M21OT-SW01_16
FM-W7	FLOW METER	2M21	2M21OT-SW01_17
FPB-2-2	AIR TERMINAL UNIT	2M21	2M21OT-SW01_18
GWH-1	PROCESS GAS WATER HEATER #1	2M21	2M21OT-SW01_19
GWH-2	PROCESS GAS WATER HEATER #2	2M21	2M21OT-SW01_20
GWH-3	PROCESS GAS WATER HEATER #3	2M21	2M21OT-SW01_21
GWH-4	PROCESS GAS WATER HEATER #4	2M21	2M21OT-SW01_22
GWH-5	PROCESS GAS WATER HEATER #5	2M21	2M21OT-SW01_23
GWH-6	PROCESS GAS WATER HEATER #6	2M21	2M21OT-SW01_24
P-C1	CHILLED WATER RETURN PUMP	2M21	2M21OT-SW01_25
P-C2	CHILLED WATER RETURN PUMP	2M21	2M21OT-SW01_26
P-D1	DOMESTIC HOT WATER PUMP #1	2M21	2M21OT-SW01_27
P-D2	DOMESTIC HOT WATER PUMP #2	2M21	2M21OT-SW01_28
P-H1	HOT WATER CIRCULATION PUMP #1	2M21	2M21OT-SW01_29
P-H2	HOT WATER CIRCULATION PUMP #2	2M21	2M21OT-SW01_30
P-P1	PROCESS HOT WATER PUMP #1	2M21	2M21OT-SW01_31
P-P2	PROCESS HOT WATER PUMP #2	2M21	2M21OT-SW01_32
P-W4	PUMP	2M21	2M21OT-SW01_33
P-W5	PUMP	2M21	2M21OT-SW01_34
SF-1		2M21	2M21OT-SW01_35
SF-2		2M21	2M21OT-SW01_36
SF-3		2M21	2M21OT-SW01_37
UCP-1	UTILITIES CONTROL PANEL	2M21	2M21OT-SW02_14
WAP-6001	WIRELESS ACCESS POINT	2M21	2M21IT-SW01_12
WAP-6002	WIRELESS ACCESS POINT	2M21	2M21IT-SW01_13
WPB-1	DOMESTING WATER SUPPLY BOOSTER PUMP SKID	2M21	2M21OT-SW01_38
WS-1	WATER SOFTENER CONTROL PANEL	2M21	2M21OT-SW01_39

Grand total: 46

ACCESS CONTROL CONNECTION SCHEDULE

EQUIPMENT ID	EQUIPMENT DESCRIPTION	FED FROM
CR-6001	CARD READER	2ACP02_5

Grand total: 1

NOTES

1. ALL NETWORK DROPS SHALL BE TAGGED ON BOTH ENDS OF CABLE WITH "FROM / TO" FORMAT WITH BRADY B-427 ROTATING VINYL WIRE LABELS. (EX. 2I01IT-SW01_24 / TD-1001)



KEY PLAN

SECTORS

OWNER

PROJECT INFORMATION

VITAL FARMS
EGG CENTRAL 2
SEYMOUR,IN

stellar
TAKING SOLUTIONS FURTHER

OPERATING AS:
THE STELLAR GROUP
2900 HARTLEY ROAD, JACKSONVILLE, FL, 32257 (904) 260-2900
WWW.STELLAR.NET

SEAL

Professional certification. I hereby certify that these documents were prepared or approved by me, and that I am a duly licensed professional architect/engineer under the laws of the state of IN

CONSULTANT

The Stellar Group, Inc.
All rights reserved. No part of this work may be used, reproduced, distributed, displayed, or otherwise communicated in any form or by any means without the prior written consent of The Stellar Group, Inc.

REVISIONS

NO.	DESCRIPTION	DATE
A	DESIGN DEVELOPMENT 2	12/12/2025
B	ISSUED FOR BID	01/16/2026
C	REVISED FOR BID	02/06/2026

DATE ISSUED:	12/12/2025
DESIGNED BY:	EJT
REVIEWED BY:	MAM
A/EOR:	
PROJECT NUMBER:	07645

SHEET TITLE

PROCESS TELECOM 1ST FLOOR PLAN, AREA 4 SECTOR 1

SHEET ID

DT4141

PRINT IN COLOR

2/7/2026 12:59:50 AM Autodesk Docs://07645_Vital Farms Egg Central Station 2/07645_VF EGG STA 2_D_R23.rvt