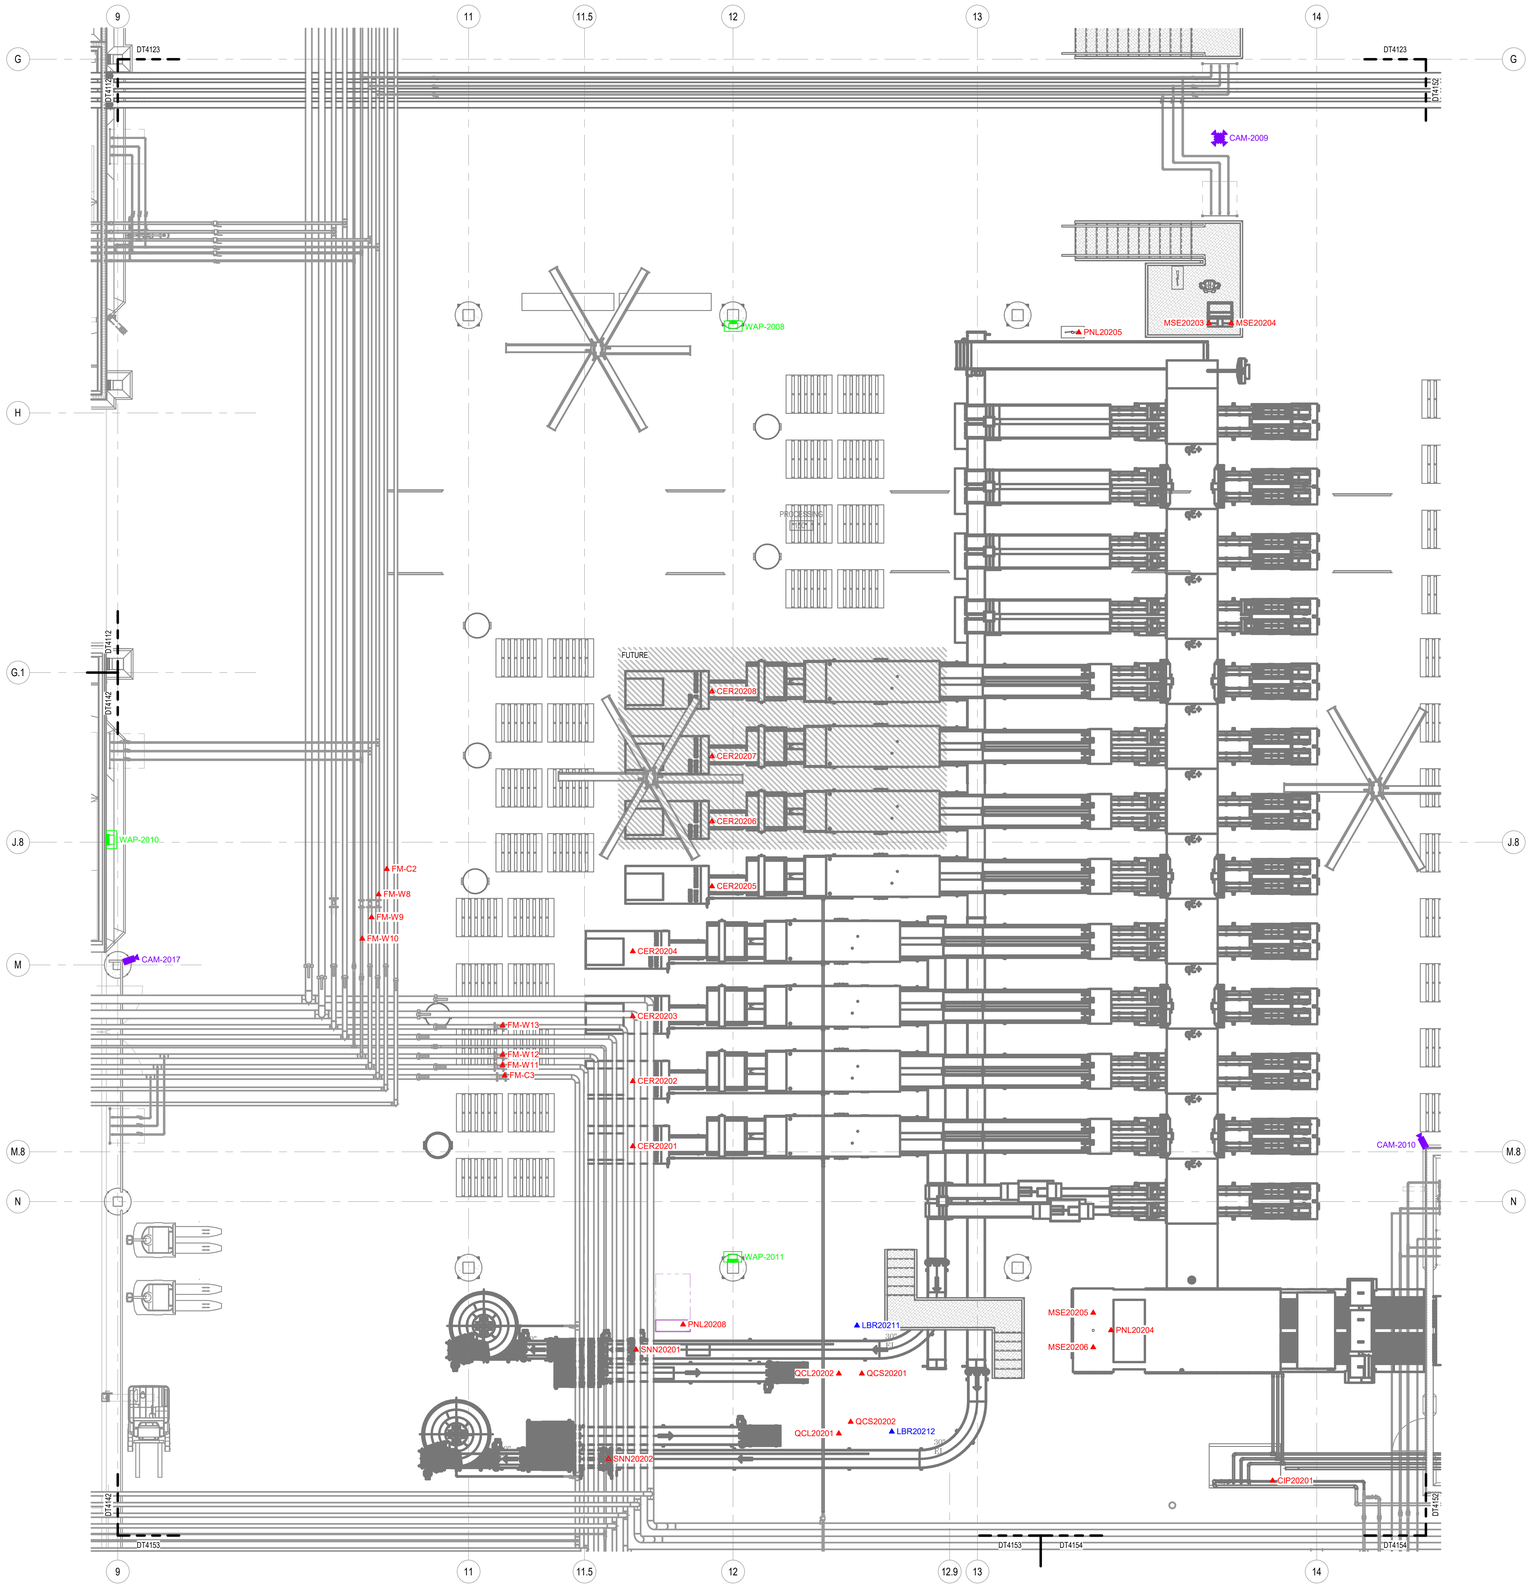

A1 ENLARGED PROCESS TELECOM 1ST FLOOR PLAN, AREA 5 SECTOR 1

SCALE: 3/16" = 1'-0"

0' 4' 8' 12' 16'

TELECOMM / DATA CONNECTION SCHEDULE

EQUIPMENT ID	EQUIPMENT DESCRIPTION	IDF	SWITCH / PORT
CAM-2009	QUAD CAMERA	203	203CS-SW01_1
CAM-2010	CAMERA	203	203CS-SW01_2
CAM-2017	CAMERA	203	203CS-SW01_8
CER20201	CASE ERECTOR	203	2030T-SW01_12
CER20202	CASE ERECTOR	203	2030T-SW01_13
CER20203	CASE ERECTOR	203	2030T-SW01_14
CER20204	CASE ERECTOR	203	2030T-SW01_15
CER20205	CASE ERECTOR	203	2030T-SW01_16
CER20206	CASE ERECTOR	203	2030T-SW01_17
CER20207	CASE ERECTOR	203	2030T-SW01_18
CER20208	CASE ERECTOR	203	2030T-SW01_19
CIP20201	EGG GRADER CIP	203	2030T-SW01_32
FM-C2	FLOW METER	203	2030T-SW02_2
FM-C3	FLOW METER	203	2030T-SW02_3
FM-W8	FLOW METER	203	2030T-SW02_4
FM-W9	FLOW METER	203	2030T-SW02_5
FM-W10	FLOW METER	203	2030T-SW02_6
FM-W11	FLOW METER	203	2030T-SW02_7
FM-W12	FLOW METER	203	2030T-SW02_8
FM-W13	FLOW METER	203	2030T-SW02_9
LBR20211	PRINT APPLY LABELER	203	203IT-SW01_15
LBR20212	PRINT APPLY LABELER	203	203IT-SW01_16
MSE20203	OPERATOR STATION	203	2030T-SW01_22
MSE20204	OVOTRACK PC STATION	203	2030T-SW01_23
MSE20205	OPERATOR STATION	203	2030T-SW01_24
MSE20206	OVOTRACK PC STATION	203	2030T-SW01_25
PNL20204	EGG GRADER CONTROL PANEL	203	2030T-SW01_2
PNL20205	CASE PACK TAKEAWAY CONTROL PANEL	203	2030T-SW01_3
PNL20208	QC CONVEYOR PANEL	203	2030T-SW01_5
QCL20201	QC CHECK / LAB	203	2030T-SW01_28
QCL20202	QC CHECK / LAB	203	2030T-SW01_29
QCS20201	QC ONLINE WORKSTATION	203	2030T-SW01_27
QCS20202	QC ONLINE WORKSTATION	203	203IT-SW01_17
SNN20201	OVOTRACK FIXED CASE SCANNER	203	2030T-SW01_30
SNN20202	OVOTRACK FIXED CASE SCANNER	203	2030T-SW01_31
WAP-2008	WIRELESS ACCESS POINT	203	203IT-SW01_1
WAP-2010	WIRELESS ACCESS POINT	203	203IT-SW01_3
WAP-2011	WIRELESS ACCESS POINT	203	203IT-SW01_4

Grand total: 38

NOTES

1. ALL NETWORK DROPS SHALL BE TAGGED ON BOTH ENDS OF CABLE WITH "FROM / TO" FORMAT WITH BRADY B-427 ROTATING VINYL WIRE LABELS. (EX. 2011IT-SW01_24 / TD-1001)



KEY PLAN

SECTORS

N

OWNER

PROJECT INFORMATION

VITAL FARMS
EGG CENTRAL 2
SEYMOUR,IN

stellar
TAKING SOLUTIONS FURTHER

OPERATING AS:
THE STELLAR GROUP
2900 HARTLEY ROAD, JACKSONVILLE, FL 32257 (904) 260-2900
WWW.STELLAR.NET

SEAL

Professional certification. I hereby certify that these documents were prepared or approved by me, and that I am a duly licensed professional architect/engineer under the laws of the state of IN.

CONSULTANT

The Stellar Group, Inc.
All rights reserved. No part of this work may be used, reproduced, distributed, displayed, or otherwise communicated in any form or by any means without the prior written consent of The Stellar Group, Inc.

REVISIONS

NO.	DESCRIPTION	DATE
A	DESIGN DEVELOPMENT 2	12/12/2025
B	ISSUED FOR BID	01/16/2026
C	REVISED FOR BID	02/06/2026

DATE ISSUED:	12/12/2025
DESIGNED BY:	EJT
REVIEWED BY:	MAM
A/E/OR:	
PROJECT NUMBER:	07645

SHEET TITLE

PROCESS TELECOM 1ST FLOOR PLAN, AREA 5 SECTOR 1

SHEET ID

DT4151

PRINT IN COLOR

2/7/2026 1:00:09 AM Autodesk Docs://07645_Vital Farms Egg Central Station 2/07645_VF EGG STA 2_D_R23.rvt